

Data sheet

# Servo piston operated 2/2-way solenoid valves for steam

## Type EV245B



EV245B is a servo piston operated 2/2-way solenoid valve for use in steam applications.

The servo piston operated design with PTFE seal on the main orifice and steel valve plate in the armature secures a reliable function and long life in steam applications.

### Features and versions

- Specifically designed for steam applications, 160 °C or 185 °C
- Differential pressure: 0.1 – 10 bar
- Media temperature from 0 – 185 °C
- Ambient temperature: Up to 40 °C
- Coil enclosure: IP65
- Thread connections: G ½ – G ¾
- DN 15 - 20
- Brass NC (normally closed)
- EV245B used with BQ coil  
AC voltage up to 185 °C
- EV245B used with BN coil  
DC voltage up to 160 °C
- EV245B used with BB coil  
AC voltage up to 160 °C  
DC voltage up to 140 °C
- Connection: ISO 228/1

## Data sheet | Servo piston operated 2/2-way solenoid valves for steam, Type EV245B

### Brass valve body, NC



Conne- ction ISO228/1	Seal mate- rial	Ori- fice size [mm]	K <sub>v</sub> - value [m <sup>3</sup> /h]	Differential pressure min. to max. [bar]				Media temperature min. to max. [°C]			Code number
				Coil type BQ AC	Coil type BN DC	Coil type BB AC	Coil type BB DC	BQ	BN DC BB AC	BB DC	
G 1/2	PTFE	15	4.5	0.1 – 10	0.1 – 5	0.1 – 5	0.1 – 3.6	0 – 185	0 – 160	0 – 140	<b>032U3833</b>
G 3/4	PTFE	20	5.5	0.1 – 10	0.1 – 5	0.1 – 5	0.1 – 3.6	0 – 185	0 – 160	0 – 140	<b>032U3853</b>

### Technical data, NC

Main type	EV245B 15 – 20
Time to open [ms] <sup>1)</sup>	200
Time to close [ms] <sup>1)</sup>	2000


<sup>1)</sup> The times are indicative. The exact times will depend on the pressure conditions.

Installation	Vertical solenoid system is recommended		
Max. working pressure (MWP)	10 bar		
Max. test pressure	25 bar		
Ambient temperature	Max. 40 °C at a medium temperature of 185 °C		
Viscosity	Max. 50 cSt		
Materials	Valve body / cover	Brass	EN 12165, CW 617N
	Armature / armature stop	Stainless steel	W. no. 1.4105 / AISI 430FR
	Armature tube	Stainless steel	W. no. 1.4306 / AISI 304L
	Springs	Stainless steel	W. no. 1.4310 / AISI 301
	Piston seal	PTFE	
	Piston ring	PTFE with grafite	
	Valve plate	Stainless steel	W. no. 1.4122
	External gasket	PTFE	


### Dimensions and weight

Type	L [mm]	B [mm]	H [mm]	H <sub>1</sub> [mm]	H <sub>2</sub> [mm]	Weight gross valve body with coil BQ, BB [kg]	Weight gross valve body with coil BN [kg]
EV245B 15B	80.5	57	124	24	100	0.75	1.03
EV245B 20B	80.5	57	124	24	100	0.72	1.00

### Dimensions

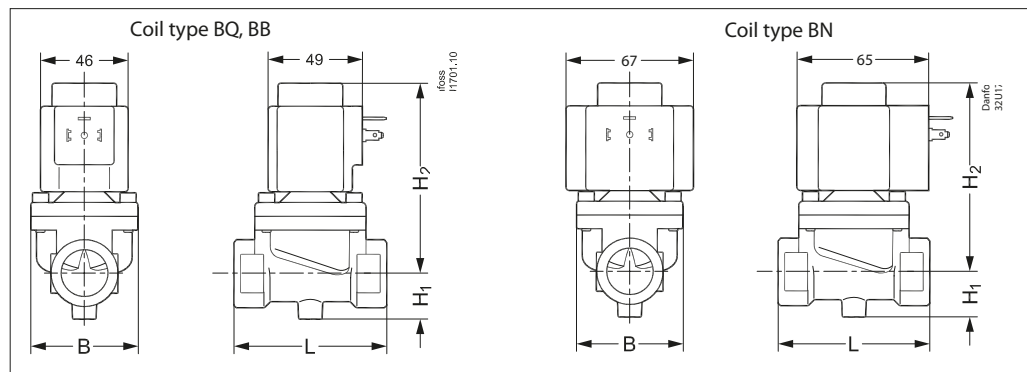

### Mounting angle

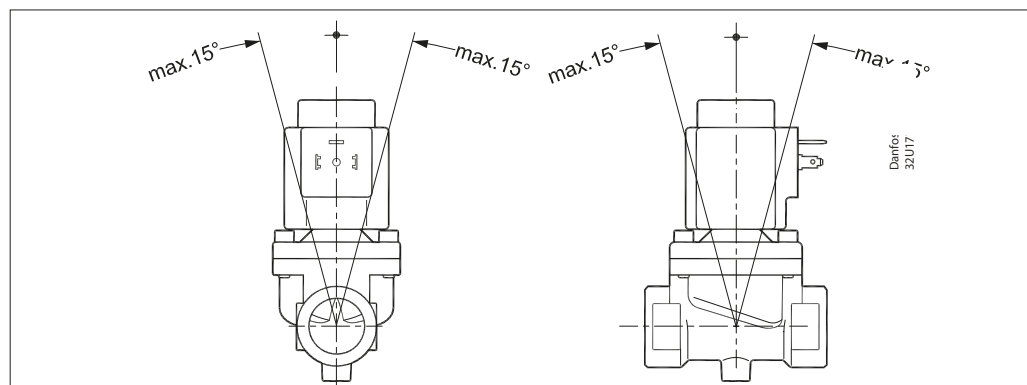

**Data sheet | Servo piston operated 2/2-way solenoid valves for steam, Type EV245B**

**Coil type BQ AC  
Steam coil to 185 °C**



Type	Tambient [°C]	Supply voltage [V]	Voltage variation	Frequency [Hz]	Power consumption		Approval	Code no.
					[W]	[VA]		
BQ024CS	-40T40	24	-15%, +10%	50	10	17	cRU <sup>®</sup> US	018F4517
		24	-15%, +10%	60	9.0	16		
BQ120BS	-40T40	110/120	-15%, +6%	60	13.5	19	cRU <sup>®</sup> US	018F4519
BQ240CS	-40T40	230	-15%, +6%	50	10	17	cRU <sup>®</sup> US	018F4511
		208/240	-6%, +6%	60	9.5	16		

**Coil type BN DC  
Steam coils to 160 °C**



Type	Tambient [°C]	Supply voltage [V]	Voltage variation	Frequency [Hz]	Power consumption		Approval	Code no.
					[W]	[VA]		
BN024DS	-40T50	24	±10%	DC	20	-	cRU <sup>®</sup> US	018F6968

**Coil type BB AC  
Steam coils to 160 °C**



Type	Tambient [°C]	Supply voltage [V]	Voltage variation	Frequency [Hz]	Power consumption		Code no.
					[W]	[VA]	
BB024AS	-40T80	24	-15%, +10%	50	11	19	018F7358
BB115AS	-40T50	115	-15%, +10%	50	11	19	018F7361
BB230AS	-40T80	220/230	-15%, +10%	50	11	19	018F7351
BB240AS	-40T80	240	-15%, +10%	50	11	19	018F7352
BB440CS	-40T80	400	±10%	50	14	24	018F7353
		440	±10%	60	15	24	
BB024BS	-40T80	24	-15%, +10%	60	14	23	018F7365
BB110CS	-40T50	110	±10%	50	15	28	018F7360
		110	±10%	60	13	22	
BB230CS	-40T50	220/230	±10%	60	13	24	018F7363
		220/230	±10%	50	16	31	

**Type BB DC  
Steam coils to 140 °C**


BB012DS	-40T50	12	±10%	DC	13	-	018F7396
BB024DS	-40T50	24	±10%	DC	16	-	018F7397

Technical data	Type BQ, BN, BB
Insulation of coil windings	Class H according to IEC 85
Connection	GDM 2011 (grey) Cable plug according to DIN 43650-A PG11
Coil enclosure, IEC 529	IP65
Ambient temperature	Max. 40°C
Duty rating	Continuous


**Accessories:  
Cable plug**



Type	Code number
GDM 2011 (grey), cable plug according to DIN 43650-A PG11	042N0156

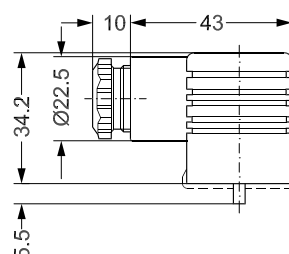

Danfoss  
42N256.10


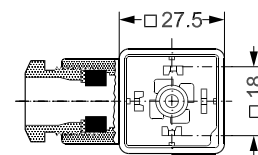


Data sheet | Servo piston operated 2/2-way solenoid valves for steam, Type EV245B

Spare part kits for EV245B 15 - EV245B 20


Type	Coil	Code number
EV245B (cover screws from top)	BQ, BN, BB, BR	032U3121

The spare part kits comprises:  
An assembled armature fitted on a piston  
All gaskets and springs.

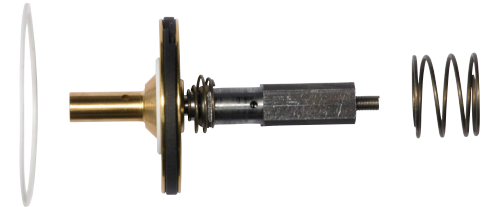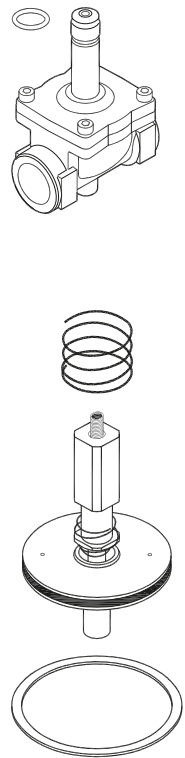

Function NC

EV245B 15 - EV245B 20

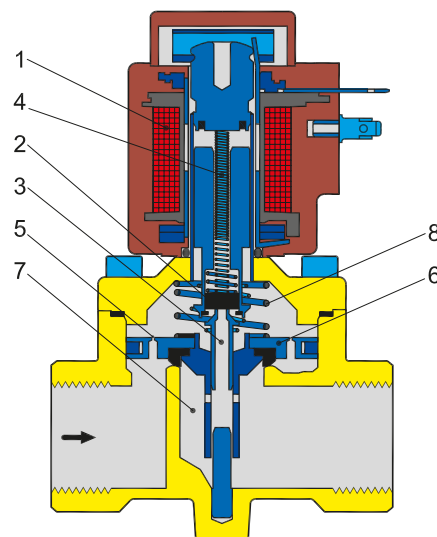

1. Coil
2. Valve plate
3. Pilot orifice
4. Armature spring
5. Equalizing orifice
6. Diaphragm
7. Main orifice
8. Closing spring

**Coil voltage disconnected (closed):**

When the voltage is disconnected, the valve plate (2) is pressed down against the pilot orifice (3) by the armature spring (4). The pressure across the piston (6) is built up via the equalizing orifice (5). The piston closes the main orifice (7) as soon as the pressure across the piston is equivalent to the inlet pressure. The valve will be closed for as long as the voltage to the coil is disconnected.


**Coil voltage connected (open):**

When voltage is applied to the coil (1), the pilot orifice (3) is opened. As the pilot orifice is larger than the equalizing orifice (5), the pressure across the piston (6) drops and therefore it is lifted clear of the main orifice (7). The valve is now open for unimpeded flow and will be open for as long as the minimum differential pressure across the valve is maintained, and for as long as there is voltage to the coil.

### Steam capacity diagrams

Example

Capacity for EV245B 20 BD; inlet pressure ( $p_1$ ) of 6 bar absolute; differential pressure at 1 bar: Approx. 100 kg/h / 80 kW

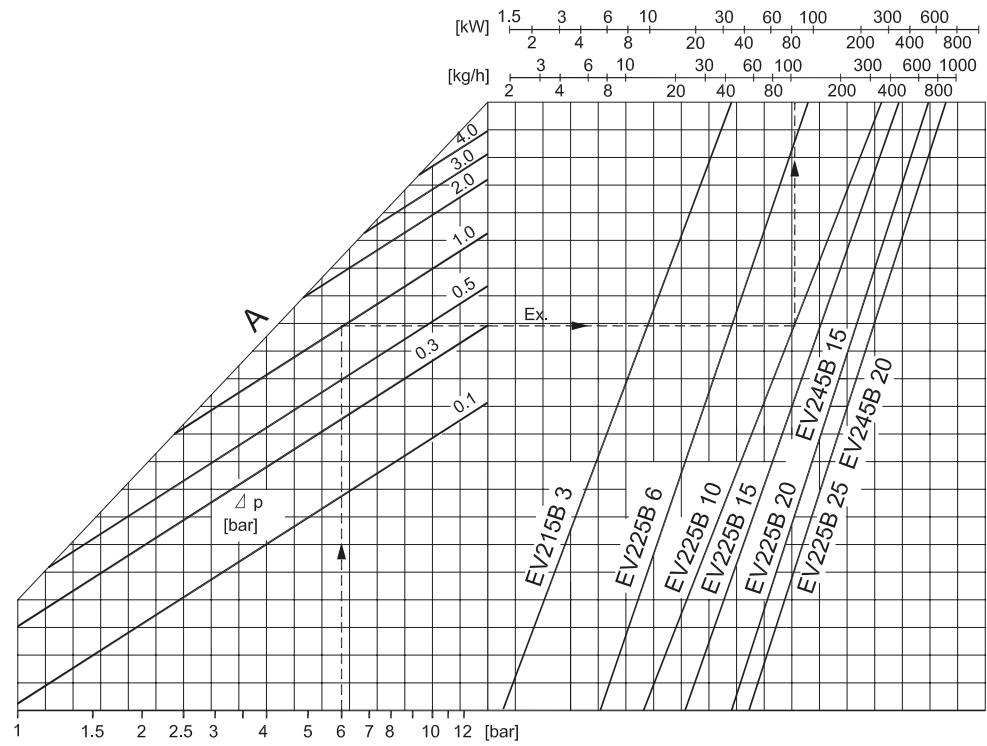

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.