

## Valves, mechanically actuated


**FESTO**



# Valves, mechanically actuated

Key features

FESTO

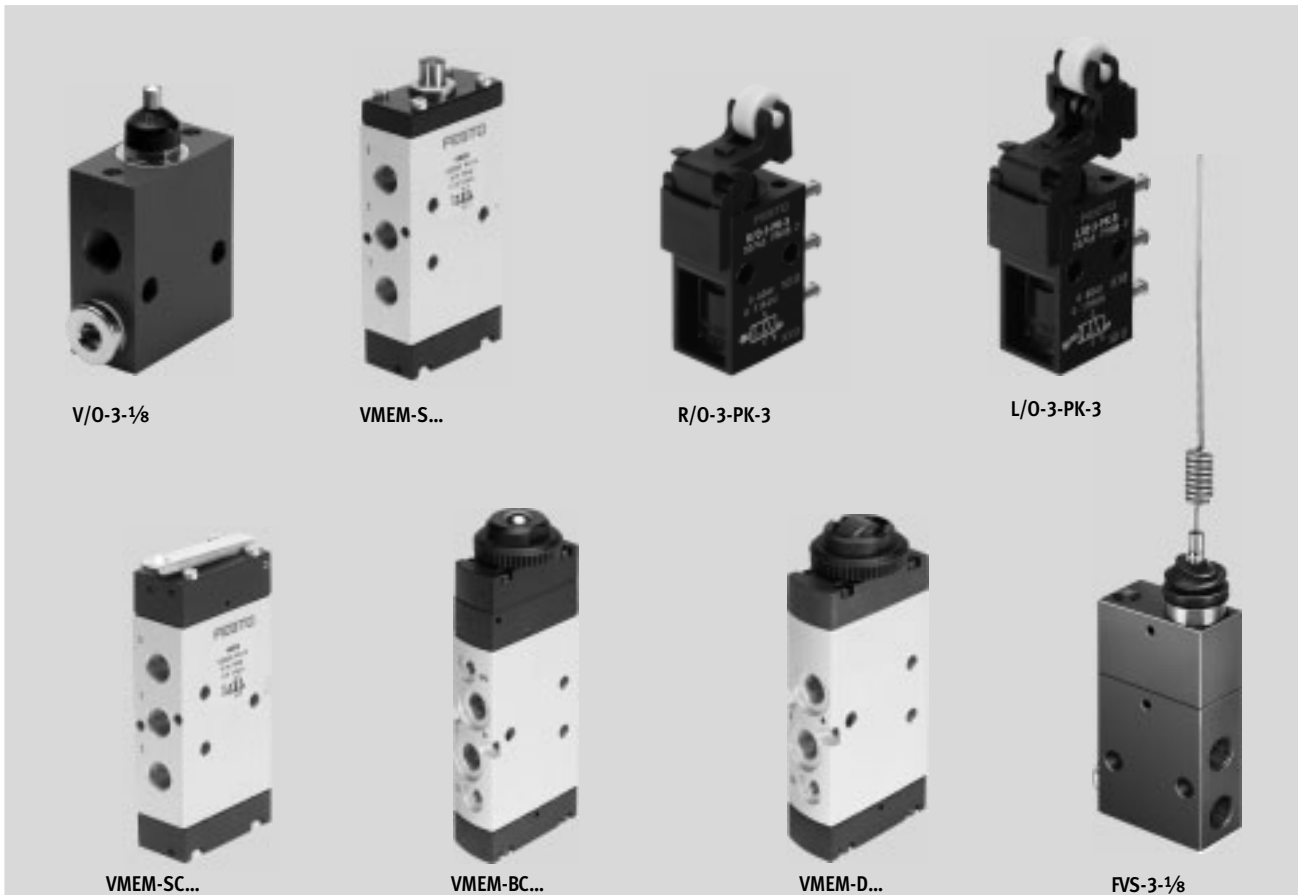

V/O-3-1/8

VMEM-S...

R/O-3-PK-3

L/O-3-PK-3

VMEM-SC...

VMEM-BC...

VMEM-D...

FVS-3-1/8

## Innovative

- Small and compact for a wide range of pneumatic applications
- Large selection of valve functions; 3/2-way, 4/2-way and 5/2-way functions
- With flow rates of up to 1,000 l/min, valves VMEM offer outstanding pneumatic performance for a great variety of applications
- Low weight
- Minimal actuating forces

## Versatile

- Flexibility of the pneumatic working ports provides a practical solution to different requirements
- Round silencer for ducted exhaust air
- Suitable for vacuum in some cases
- Reverse operation possible in some cases
- Actuation: direct and piloted
- Pressure range from vacuum to 10 bar possible
- Version:
  - Stem actuated valve
  - Swivel lever valve
  - Roller lever valve, toggle lever valve
  - Whisker valve
  - Roller actuated valve
  - Ball actuated valve

## Reliable


- Durable thanks to proven piston spool and piston poppet valves
- Sturdy thanks to metal or plastic housing and connecting thread or connector

## Easy to mount

- Front panel mounting or mounting on bracket

# Valves, mechanically actuated

Key features

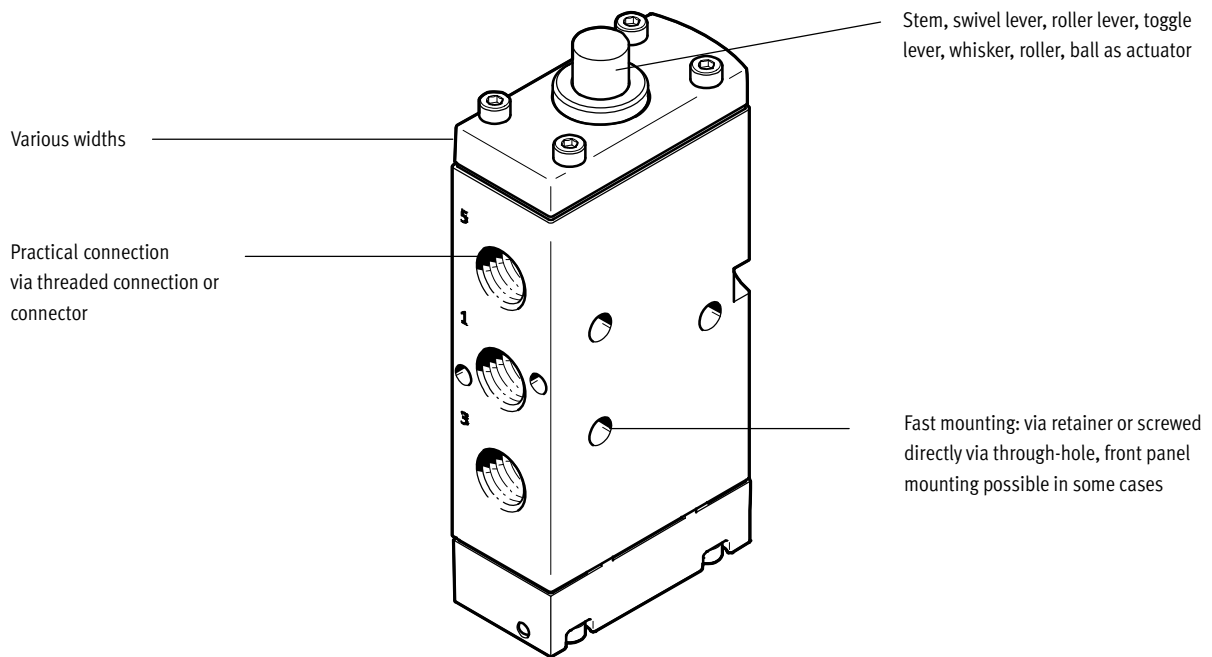

## Equipment options

### 3/2-way valve, monostable

- Normally open/closed
- Mechanical spring
- Vacuum operation possible
- Directly actuated and pneumatically piloted
- Ducted exhaust air

### 4/2-way valve, monostable

- Mechanical spring
- Pneumatically piloted
- Ducted exhaust air

### 5/2-way valve, monostable

- Pneumatic spring/mechanical spring
- Vacuum operation possible
- Reverse operation in some cases
- Pneumatically piloted
- Ducted exhaust air

## Valve selection

→ Internet: [www.festo.com](http://www.festo.com)

You order mechanically and manually operated valves using the order code:

Ordering system for valves  
 → Internet: mechanically and manually operated directional control valves



# Valves, mechanically actuated

Peripherals overview

## Valves, mechanically actuated

5/2-way stem actuated valve VMEM-S



3/2-way roller lever valve R

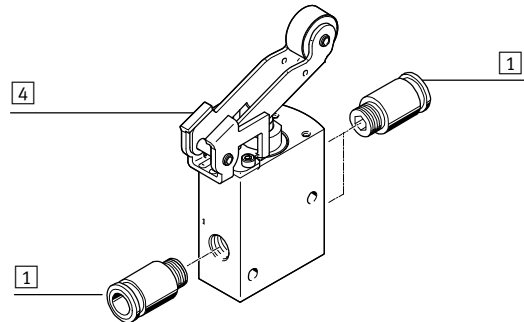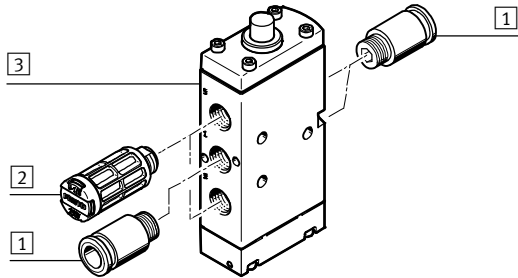

	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	47
2	Silencer	For exhaust ports (3, 5)	47
3	Stem actuated valve	VMEM-S	25
4	Roller lever valve	R	32


3/2-way roller lever valve with idle return L

3/2-way toggle lever valve LS

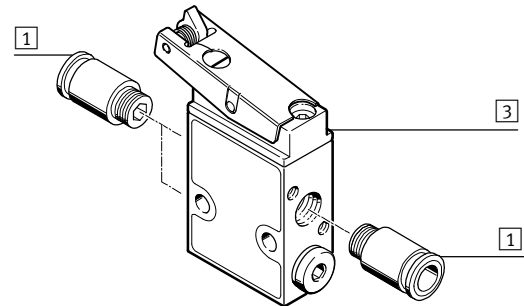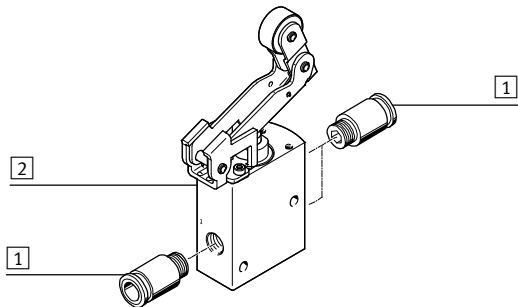

	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	47
2	Roller lever valve with idle return	L	32
3	Toggle lever valve	LS	32

5/2-way roller actuated valve VMEM-D

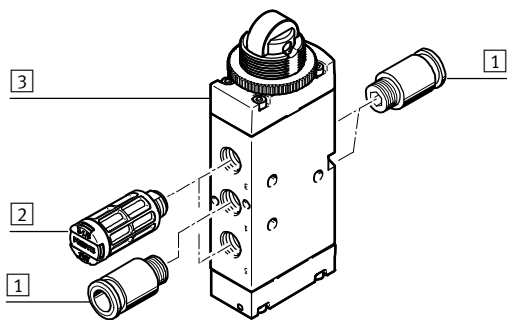

	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	47
2	Silencer	For exhaust ports (3, 5)	47
3	Roller actuated valve	VMEM-D	40

# Valves, mechanically actuated

Key features – Pneumatic components

## Mechanically actuated valves

Mechanically actuated valves are often used as "signal valves" and feed back a pneumatic signal to the controller. This feedback, e.g. "End position reached", is realised via a stem actuated valve or roller actuated

valve. This is a simple application, but it is an extremely popular solution for smaller machines and conveying systems, e.g. for controlling simple clamping and locking operations in

semi-automated assembly and production. The modern design with metal housing combines sturdiness and functionality.

Advantages of mechanically actuated valves:

- No electronic controller required
- No programming effort required
- Easy to adjust and connect
- Control and measurement via sensors

Valve functions		
Circuit symbol	Type	Description
Stem actuated valve		
	VMEM-ST-M32C-M V-3-M5 V-3-1/4-B V/O-3-PK-3	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum (not V/O-3-PK-3)</li> </ul>
	VMEM-ST-M32U-M VO-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	V/O-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open/closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	VMEM-STC-M32C-M VS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Pneumatically piloted, internal pilot air</li> <li>• Mechanical spring return</li> </ul>
	VMEM-STC-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Pneumatically piloted, internal pilot air</li> <li>• Mechanical spring return</li> </ul>
	VOS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Pneumatically piloted, internal pilot air</li> <li>• Mechanical spring return</li> </ul>
	VMEM-STCZ-M32C-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Pneumatically piloted, external pilot air</li> <li>• Mechanical spring return</li> </ul>
	VMEM-STCZ-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Pneumatically piloted, external pilot air</li> <li>• Mechanical spring return</li> </ul>
	VS-4-1/8	4/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatically piloted, internal pilot air</li> <li>• Mechanical spring return</li> </ul>

# Valves, mechanically actuated

Key features – Pneumatic components

Valve functions		
Circuit symbol	Type	Description
Stem actuated valve		
	VMEM-S-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	VMEM-S-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• (Internal) pneumatic spring return</li> </ul>
	VMEM-S-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• (External) pneumatic spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	VMEM-SC-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatically piloted, internal pilot air</li> <li>• Mechanical spring return</li> </ul>
	VMEM-SC-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatically piloted, internal pilot air</li> <li>• (Internal) pneumatic spring return</li> </ul>
	VMEM-SCZ-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatically piloted, external pilot air</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	VMEM-SCZ-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatically piloted, external pilot air</li> <li>• (External) pneumatic spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	V-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open/closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
Swivel lever valve		
	RW/O-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open/closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
Whisker valve		
	FVS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	FVSO-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>

# Valves, mechanically actuated

Key features – Pneumatic components

Valve functions – Circuit symbol		
Circuit symbol	Type	Description
Roller lever valve with idle return		
	L/O-3-PK-3	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open/closed</li> <li>• Mechanical spring return</li> </ul>
	L-3-M5 L-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	L-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
Toggle lever valve		
	LS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	LOS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	LO-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	LS-4-1/8	4/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>

# Valves, mechanically actuated

Key features – Pneumatic components

Valve functions – Circuit symbol		
Circuit symbol	Type	Description
Roller lever, roller actuated valve		
	VMEM-DT-M32C-M R-3-M5 R-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	VMEM-DT-M32U-M RO-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>
	VMEM-D-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	VMEM-D-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• (Internal) pneumatic spring return</li> </ul>
	VMEM-D-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• (External) pneumatic spring return</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	R/O-3-PK-3	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open/closed</li> <li>• Mechanical spring return</li> </ul>
	RS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	ROS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	RS-4-1/8	4/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	R-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Suitable for vacuum</li> </ul>



# Valves, mechanically actuated

Key features – Pneumatic components

Valve functions		
Circuit symbol	Type	Description
Ball actuated valve		
	VMEM-BTC-M32C-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	VMEM-BTC-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	VMEM-BTCZ-M32C-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, external pilot air</li> </ul>
	VMEM-BTCZ-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, external pilot air</li> </ul>
	VMEM-BC-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	VMEM-BC-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatic spring return</li> <li>• Pneumatically piloted, internal pilot air</li> </ul>
	VMEM-BCZ-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Mechanical spring return</li> <li>• Pneumatically piloted, external pilot air</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>
	VMEM-BCZ-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> <li>• Pneumatic spring return</li> <li>• Pneumatically piloted, external pilot air</li> <li>• Suitable for vacuum</li> <li>• Reverse operation possible</li> </ul>

- - Note

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

# Valves, mechanically actuated


Type codes

FESTO


		VMEM	-	STCZ	-	M32C	-	M	-	G14
<b>Valve series</b>										
VMEM	Mechanically actuated valves									
<b>Version</b>										
Actuation										
S	Stem actuated valve									
D	Valve with roller actuation									
B	Valve with ball actuation									
Design principle										
-	Piston spool									
T	Disk seat									
Actuation method										
-	Directly actuated									
C	Pneumatically piloted									
Pilot air supply										
-	Internal									
Z	External									
Switching function										
-	Monostable valve									
A	Active (spring)									
X	Passive (air)									
<b>Valve function</b>										
M32C	3/2-way valve, monostable, normally closed									
M32U	3/2-way valve, monostable, normally open									
M52	5/2-way valve, monostable									
<b>Reset method</b>										
-	None									
A	Pneumatic spring, internal									
E	Pneumatic spring, external									
M	Mechanical spring									
<b>Pneumatic connection</b>										
G14	Fitting G $\frac{1}{4}$									
G18	Fitting G $\frac{1}{8}$									


# Stem actuated valves

Technical data – Stem actuated valve, standard nominal flow rate 80 ... 160 l/min

-  Flow rate  
80 ... 1,000 l/min

Mounting via through-holes

-  Pressure  
-0.95 ... +10 bar

-  Temperature range  
-10 ... +60 °C



General technical data						
Type	V-3-M5	V/O-3-PK-3	VS-3-1/8 VOS-3-1/8	VS-4-1/8	V/O-3-1/8	RW/O-3-1/8
Standard nominal flow rate [l/min] 1 → 2	80		146 ... 154 (VS...) 141 ... 161 (VOS...)	140 ... 147	140	
Valve function	3/2-way valve		3/2-way valve	4/2-way valve	3/2-way valve	
Exhaust air	-	-	Flow control		-	-
Design	Disk seat valve, directly actuated		Disk seat valve, piloted		Disk seat valve, directly actuated	
Direction of flow	-	-	Non-reversible		-	-
Sealing principle	-	-	Soft		-	-
Mounting position	-	-	Any		-	-
Note on forced checking procedure	-	-	Min. 1/year		-	-
Pneumatic connection	M5	PK-3 1)	G1/8	G1/8	G1/8	
Nominal size [mm]	2.0	2.5	3.5	3.5	3.5	
Weight [g]	25	20	110	220	90	150
Actuating force [N]	23.0	17.0	3.0	3.2	28.0	28.0
• at 6 bar						
• with normally closed position	[N]	-	17.0	-	-	37.5
• with normally open position	[N]	-	24.0	-	-	-

1) PK-3=Barbed fitting for plastic tubing with 3 mm nominal diameter

Materials						
Type	V-3-M5	V/O-3-PK-3	VS-3-1/8 VOS-3-1/8	VS-4-1/8	V/O-3-1/8	RW/O-3-1/8
Seal	NBR					
Housing	Die-cast zinc	POM	Anodised aluminium			
Note on materials	-	-	RoHS-compliant		-	-

# Stem actuated valves

Technical data – Stem actuated valve, standard nominal flow rate 80 ... 160 l/min

Operating and environmental conditions						
Type	V-3-M5	V/O-3-PK-3	VS-3-1/8 VOS-3-1/8	VS-4-1/8	V/O-3-1/8	RW/O-3-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [-:-:-]					
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)					
Operating pressure range [bar]	-0.95 ... 8	0 ... 8	3.5 ... 8		-0.95 ... 8	-0.95 ... 8
Temperature of medium [°C]	-10 ... +60					
Ambient temperature [°C]	-10 ... +60	-	-10 ... +60			
Corrosion resistance class CRC <sup>1)</sup>	-	-	2		-	-

1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Technical data – Actuator attachment for swivel lever valve RW/O-3-1/8				
Swivel lever, type		ASK-02 (short)	ASL-02 (long)	ASS-02 (rod)
Actuating force [N]	Max.	7	Dependent on starting height	Dependent on starting height
Weight [g]		30	35	30

Materials – Swivel lever	
Swivel lever	Aluminium, steel

## Stem actuated valves

FESTO

Technical data – Stem actuated valve, standard nominal flow rate 500 l/min

General technical data					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Standard nominal flow rate [l/min] 1 → 2	500				
Valve function	3/2-way valve		5/2-way valve		
Reset method	Mechanical spring		Mechanical or pneumatic spring		
Design	Disk seat valve, directly actuated	Disk seat valve, piloted	Piston spool valve, directly actuated	Piston spool valve, piloted	Piston spool valve, piloted
Pneumatic connection	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Pilot air supply	–	Internal or external	–	Internal	External
Nominal size [mm]	4.0	4.0	4.0	4.0	4.0
Weight [g]	130	152	148	170	170
Actuating force [N]	80 <sup>1)</sup> 130	15.5	28 <sup>2)</sup> 39	15.5	15.5

1) Value 80 with normally closed valve, value 130 with normally open valve

2) Value 28 with mechanical spring reset method, value 39 with pneumatic spring reset method

Materials					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Cover	–	POM	PA		
Seal	NBR				
Housing	Anodised wrought aluminium alloy				
Note on materials	RoHS-compliant				

Operating and environmental conditions					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]				
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)				
Operating pressure range [bar]					
N/C valves	–0.95 ... 8	3.5 ... 8	–	–	–
N/O valves	–0.95 ... 8	4.5 ... 8	–0.95 ... 10 <sup>1)</sup>	2.5 ... 10 <sup>2)</sup>	2.5 ... 10
Temperature of medium [°C]	–10 ... +60				
Ambient temperature [°C]	–10 ... +60				

1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)

2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)

## Stem actuated valves

FESTO

Technical data – Stem actuated valve, standard nominal flow rate 550 ... 600 l/min

General technical data			
Type	V-5-1/4-B	VO-3-1/4-B	V-3-1/4-B
Standard nominal flow rate [l/min] 1 → 2	550	600	
Valve function	5/2-way valve	3/2-way valve	
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4	G1/4
Nominal size [mm]	7.0	7.0	7.0
Weight [g]	240	130	130
Actuating force [N]	179.0	117.0	66.5

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Temperature of medium [°C]	-10 ... +60
Ambient temperature [°C]	-10 ... +60

# Stem actuated valves

Technical data – Stem actuated valve, standard nominal flow rate 1,000 l/min

General technical data				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Standard nominal flow rate [l/min] 1 → 2	1,000			
Valve function	3/2-way valve	5/2-way valve		
Reset method	Mechanical spring	Mechanical or pneumatic spring		
Design	Disk seat valve, directly actuated	Piston spool valve, directly actuated	Piston spool valve, directly actuated	Piston spool valve, directly actuated
Pneumatic connection	G $\frac{1}{4}$	G $\frac{1}{4}$	G $\frac{1}{4}$	G $\frac{1}{4}$
Pilot air supply	–	–	Internal	External
Nominal size [mm]	6.0	6.0	6.0	6.0
Weight [g]	198	320	300	300
Actuating force [N]	80 <sup>1)</sup> 140	38.0 <sup>2)</sup> 65.0	15.0	15.5

1) Value 80 with normally closed valve, value 140 with normally open valve

2) Value 38 with mechanical spring reset method, value 65 with pneumatic spring reset method

Materials				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Cover	–	PA		
Seal	NBR			
Housing	Anodised wrought aluminium alloy			
Note on materials	RoHS-compliant			

Operating and environmental conditions				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Operating medium	Compressed air to ISO 8573-1:2010 [7:--:--]			
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)			
Operating pressure range [bar]				
N/C valves	–0.95 ... 8	–	–	–
N/O valves	–0.95 ... 8	–0.95 ... 10 <sup>1)</sup>	2.5 ... 10 <sup>2)</sup>	2.5 ... 10
Temperature of medium [°C]	–10 ... +60			
Ambient temperature [°C]	–10 ... +60			

1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)


2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)

# Stem actuated valves


Sectional views

## Sectional view


V-3-1/4-B, normally closed

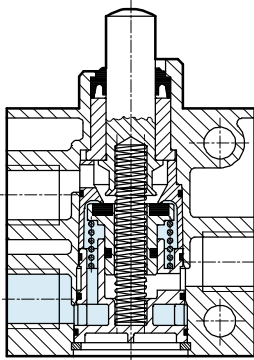


VO-3-1/4-B, normally open

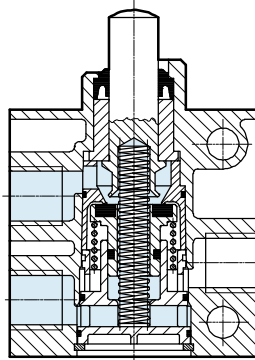


V/O-3-PK-3

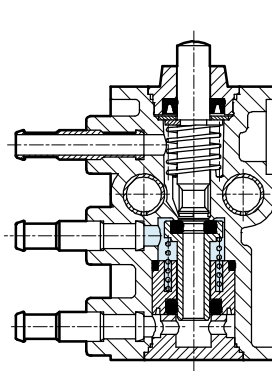


V/O-3-1/8

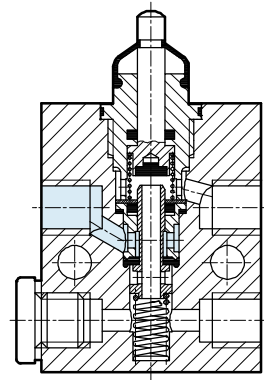


V ... -3-1/8, normally closed

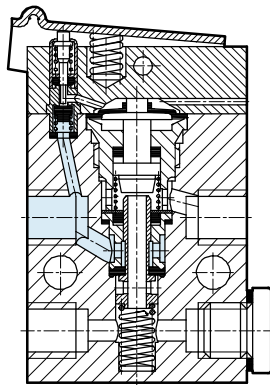


Actuator attachment at left  
(number 1 on the attachment above  
number 1 on the housing)




V ... -3-1/8, normally open

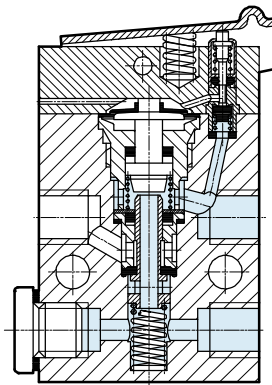

Actuator attachment at right  
(number 1 on the attachment above  
number 2 on the housing)




VS-4-1/8

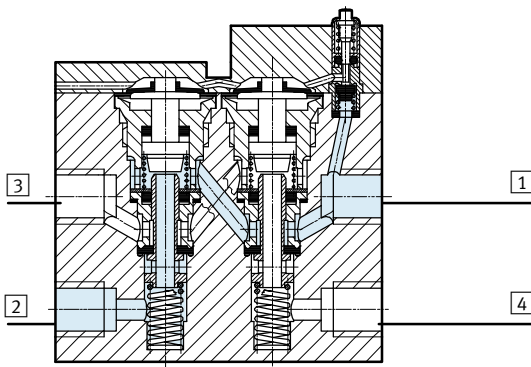

- 1 Supply port
- 2, 4 Working port
- 3 Exhaust port

V-3-M5



-  - Note

The sectional views, shown on the stem actuated valve, also apply in principle to the roller lever, toggle lever and swivel lever valves. The

function remains the same, only the operation via actuator attachments differs.



# Stem actuated valves


Technical data

FESTO

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

Stem actuated valve V-3-1/4-B, VO-3-1/4-B

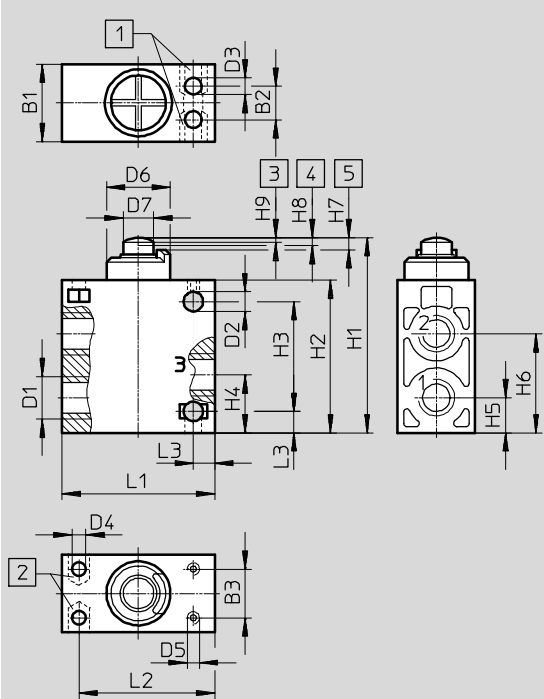

- 1 Holder for hex nut M5 to DIN 934
- 2 Holder for hex nut M5 to DIN 934
- 3 Start of opening
- 4 Max. opening
- 5 Max. stroke

Stem actuated valve V-5-1/4-B

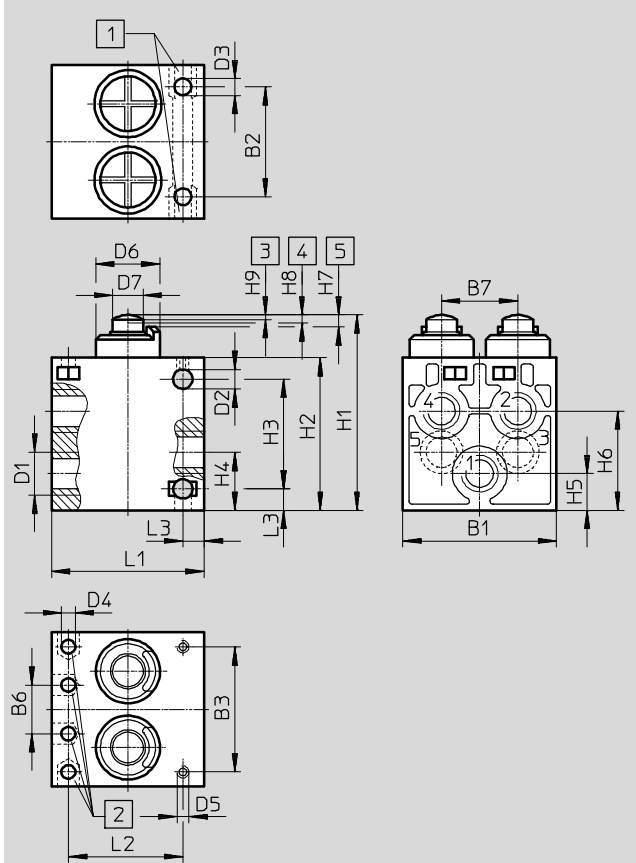

- 1 Holder for hex nut M5 to DIN 934
- 2 Holder for hex nut M5 to DIN 934
- 3 Start of opening
- 4 Max. opening
- 5 Max. stroke

Stem actuated valve	B1	B2	B3	B6	B7	D1	D2	D3	D4	D5	D6	D7
V-3-1/4-B, VO-3-1/4-B	25.4	11	16	-	-	G1/4	6.4	5.5	4.5	M4	21	10
V-5-1/4-B	50.4	36	41	16	25	G1/4	6.4	5.5	4.5	M4	21	10

Stem actuated valve	L1	L2	L3	H1	H2	H3	H4	H5	H6	H7	H8	H9
V-3-1/4-B, VO-3-1/4-B	50	44.5	7	64	50	36	19	11.5	32.5	4	2.6	1.7
V-5-1/4-B	50	37.5	7	64	50	36	19	11.5	32.5	4	2.6	1.7

# Stem actuated valves


Technical data

FESTO


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


Stem actuated valve V/O-3-PK-3

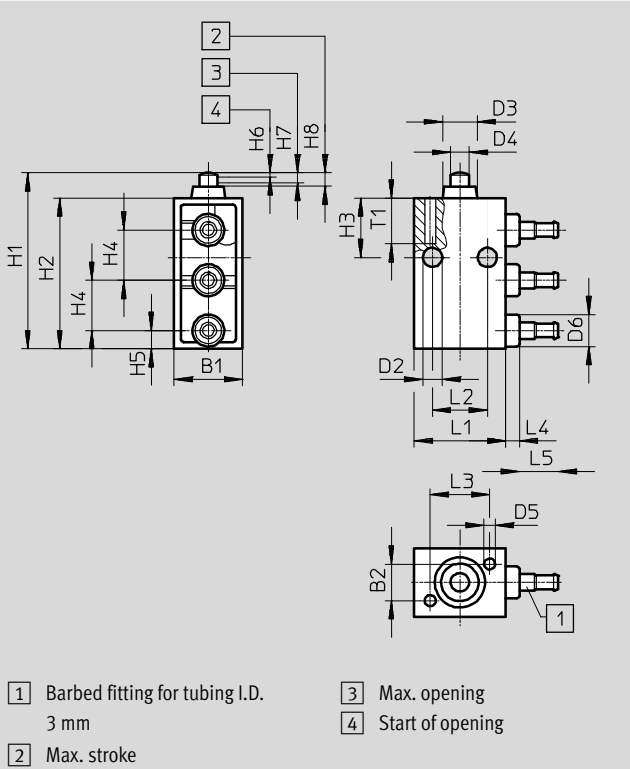

Stem actuated valve V-3-M5

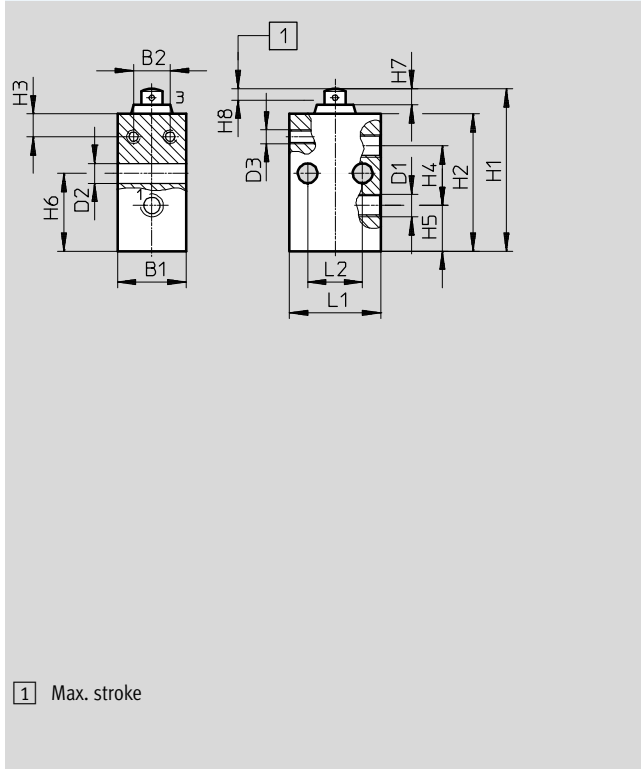

Stem actuated valve VS-4-1/8

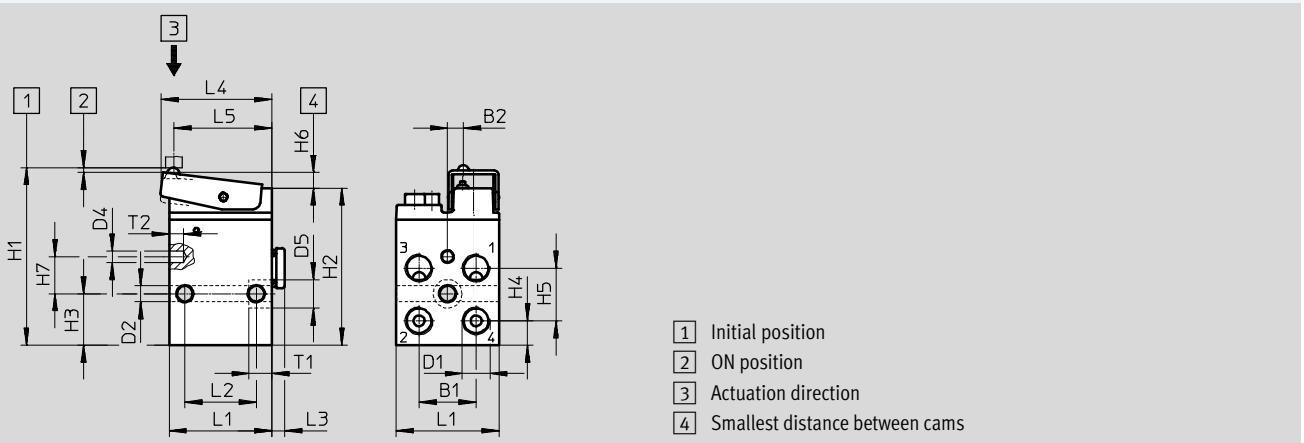

Stem actuated valve	B1	B2	D1	D2	D3	D4	D5	D6	T1	T2
V/O-3-PK-3	15	8	-	4.3	7.5	4	2.4	7	10	-
V-3-M5	15	8	M5	4.3	M3	-	-	-	-	-
VS-4-1/8	20	5.5	G1/8	5.3	-	4.1	10	-	8	5

Stem actuated valve	L1	L2	L3	L4	L5	H1	H2	H3	H4	H5	H6	H7	H8	H14
V/O-3-PK-3	20	12	13	3	8.5	38.5	33	13	11	4	0.9	2.1	2.9	-
V-3-M5	-	-	-	-	-	35.5	30	8	13	10	17	3.5	2.5	-
VS-4-1/8	36	25	5	39	35.5	62.5	55	18	8.5	18.5	5.5	-	-	13


# Stem actuated valves

Technical data


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


Stem actuated valve V/O-3-1/8

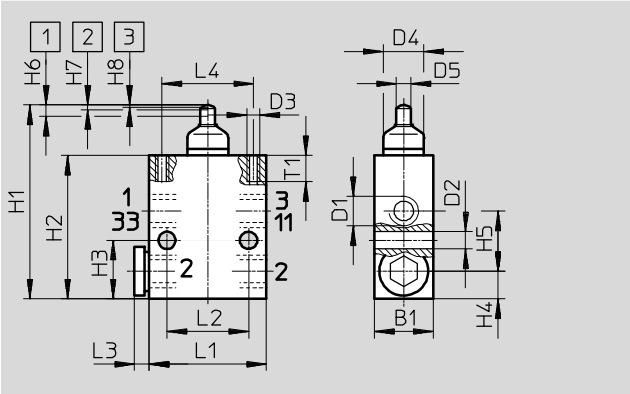

Roller lever AR-01 as actuator attachment for stem actuated valve V/O-3-1/8

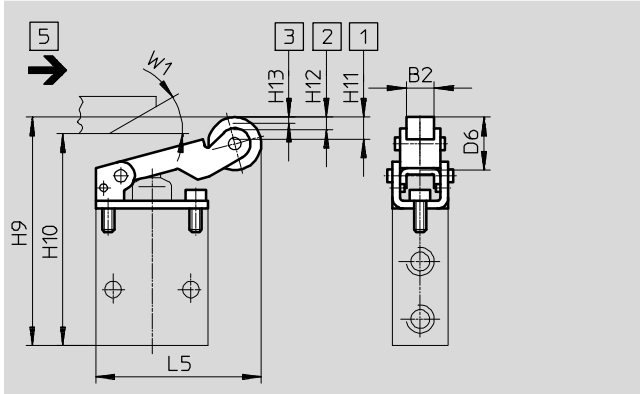

Roller lever with idle return AL-01 as actuator attachment for stem actuated valve V/O-3-1/8

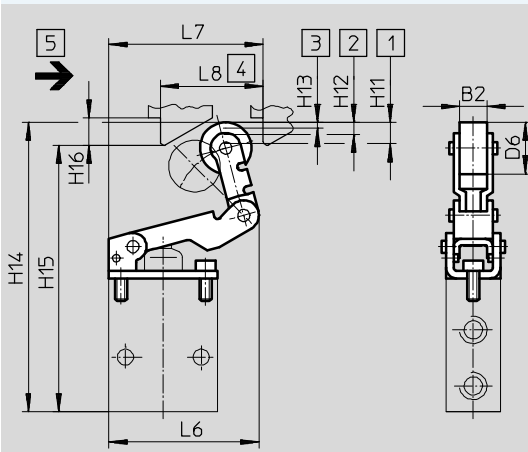

- 1 Max. stroke
- 2 Max. opening
- 3 Start of opening
- 4 Min. actuation stroke
- 5 Actuation direction



Stem actuated valve	B1	D1	D2	D3	D4	D5	L1	L2	L3	L4	H1	H2	H3	H4	H5	H6	H7 ±0.2	H8 ±0.2	T1
V/O-3-1/8	18	G1/8	5.3	M4	12.5	4.5	36	25	4.5	28	59.5	44	18	8.5	18.5	3.5	1.4	0.6	8

Roller lever	B2	D6	L5	L6	L7	L8	H9	H10 min.	H11	H12 +0.2	H13 +0.2	H14	H15 min.	H16	W1
AR-01	8	17	54	-	-	-	71	64	7	4	2	-	-	-	30°
AL-01	8	17	-	50.5	51	34	-	-	7	4	2	93.5	86.5	9	-

# Stem actuated valves

Technical data

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

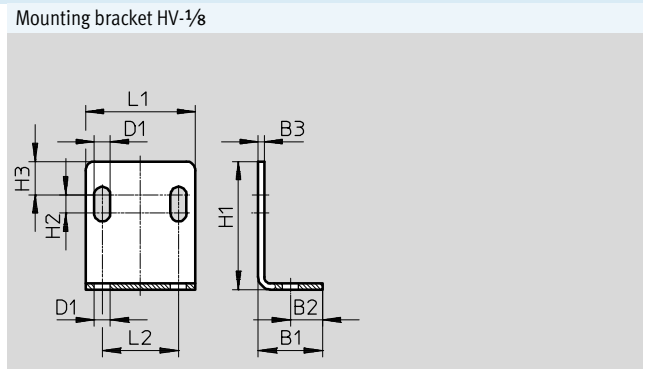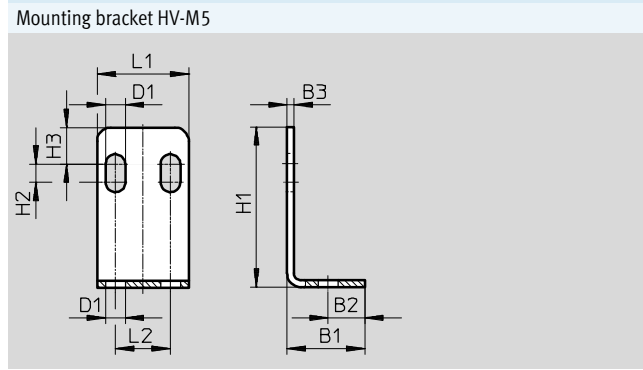

Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11


# Stem actuated valves

Technical data

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

### Stem actuated valve VMEM-ST-M32

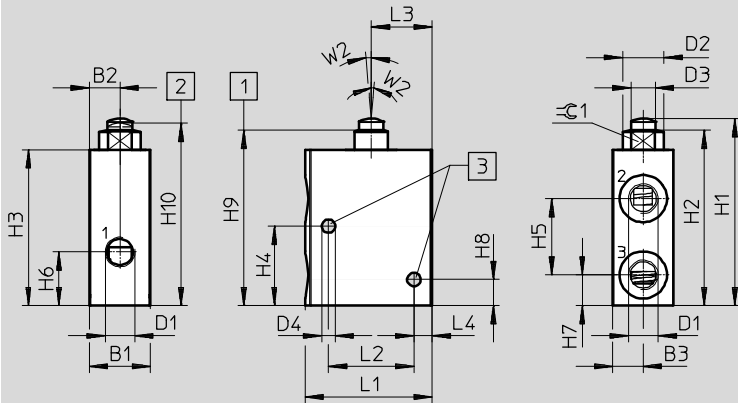


1 Maximum stroke      2 Start of opening      3 Mounting holes

Stem actuated valve	B1	B2	B3	D1	D2	D3	D4	L1	L2	L3	L4	∠1
VMEM-ST...32...G18	20	10	10	G $\frac{1}{8}$	13.5	8	4.4	41.7	28	20	6	11
VMEM-ST...32...G14	25	12.5	12.5	G $\frac{1}{4}$	15	10	4.4	52.1	36	25	7	13

Stem actuated valve	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10±0.3	W2
VMEM-ST...32...G18	61.6±0.3	57.4	51	26	25	17.5	10	8.5	58.1±0.4	59.8	5°
VMEM-ST...32...G14	73.3±0.2	67.7	61	26	28	23.5	12.5	8	68.6±0.6	70.5	5°

### Stem actuated valve VMEM-STC-M32...G18

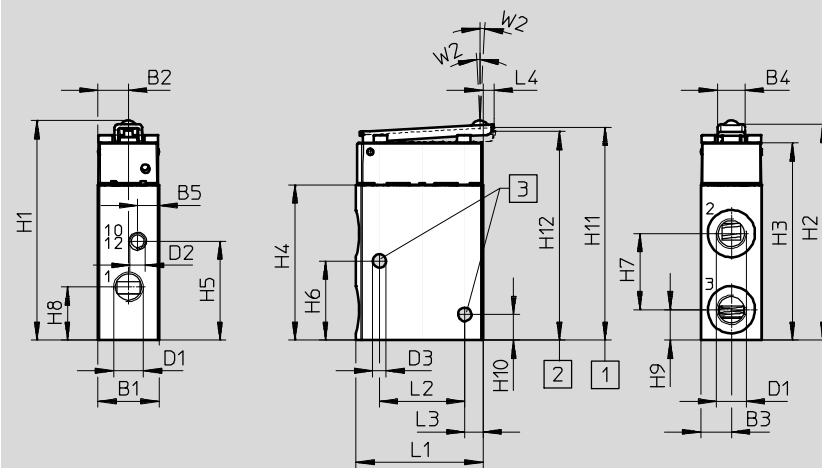

1 Maximum stroke      2 Start of opening      3 Mounting holes

Stem actuated valve	B1	B2	B3	B4	B5	D1	D2	D3	L1	L2	L3	L4	W2
VMEM-STC...32...G18	20	10	10	9	7	G $\frac{1}{8}$	M5	4.4	41.7	28	6	3.5	3°

Stem actuated valve	H1±0.4	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11±0.4	H12±0.15
VMEM-STC...32...G18	72.1	70.8	64.8	51	32.5	26	25	17.5	10	8.5	71.2	70.35

# Stem actuated valves


Technical data



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Stem actuated valve VMEM-S-M52

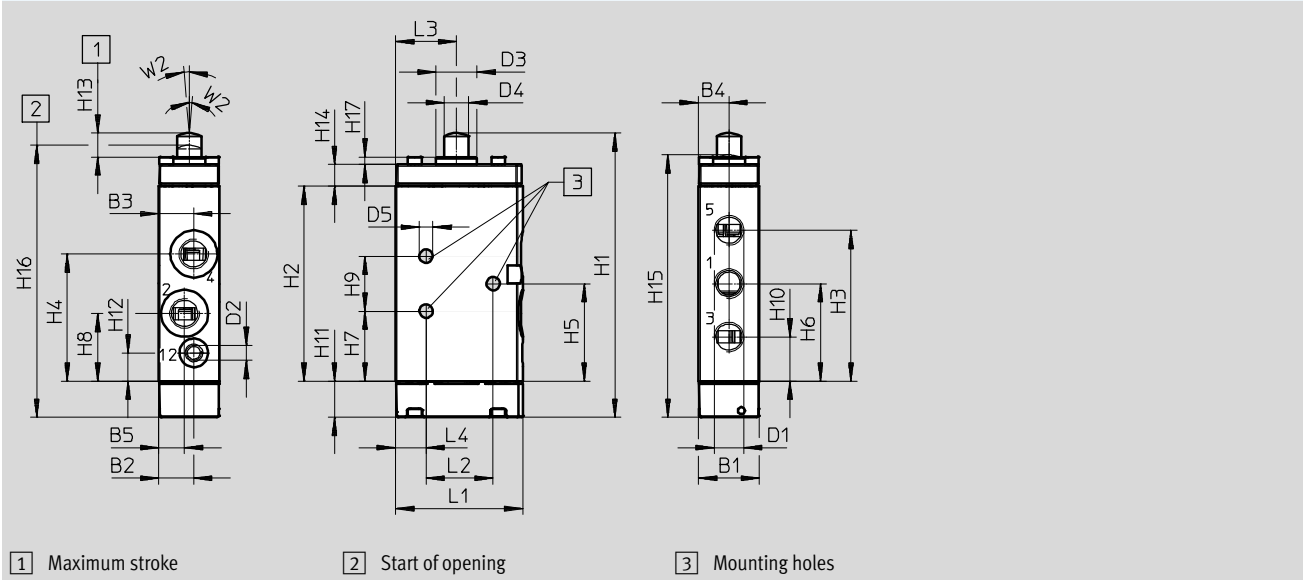

Stem actuated valve	B1	B2	B3	B4	B5	D1	D2	D3	D4	D5	L1	L2	L3	L4	W2
VMEM-S...52...G18	20	11.5	11.5	10	8.5	G $\frac{1}{8}$	M5	13.5	8	4.4	41.7	25	20	7	5°
VMEM-S...52...G14	25	14.2	14.2	12.5	10.8	G $\frac{1}{4}$	M5	15	10	4.4	52.1	31	25	9.5	5°

Stem actuated valve	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16	H17
VMEM-S...52...G18	93.4±0.4	64	49.5	41.8	32	32	23	22.3	18	14.5	11.8	9.3	7.8	7.1	86.3±0.4	89.4±1	2.5
VMEM-S...52...G14	118.5±0.3	87	68.1	60.1	43.5	43.8	31.4	28.5	24.3	19.5	11	10.1	9	8.3	110.1±0.3	113.7±1.3	3


# Stem actuated valves

Technical data

**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)

Stem actuated valve VMEM-SC ... -M52

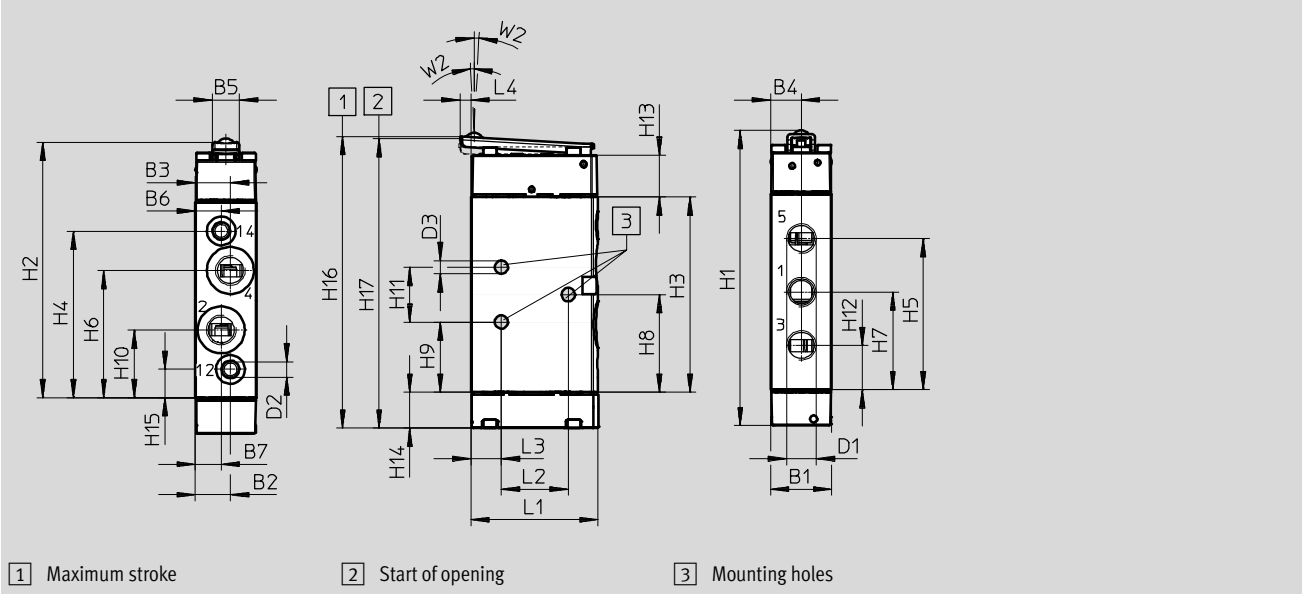

Stem actuated valve	B1	B2	B3	B4	B5	B6	B7	D1	D2	D3	L1	L2	L3	L4	W2
VMEM-SC...52...G18	20	11.5	11.5	10	9	8.5	8.5	G $\frac{1}{8}$	M5	4.4	41.7	25	7	3.5	3°
VMEM-SC...52...G14	25	14.2	14.2	12.5	12	10.8	10.8	G $\frac{1}{4}$	M5	4.4	52.1	31	9.5	4.6	3°

Stem actuated valve	H1±0.4	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16±0.4	H17+0.5
VMEM-SC...52...G18	96.9	83.8	64	54.7	49.5	41.8	32	32	23	22.3	18	14.5	13.8	11.8	9.3	95.6	95.1
VMEM-SC...52...G14	119.4	106.8	87.3	77.5	68.1	59.1	43.8	43.5	31.4	28.5	24.3	19.5	13.8	11	10.1	117.8	117.4

# Stem actuated valves

Ordering data


Ordering data							
Nominal flow rate [l/min]	Valve function	Description	Mechanical reset	Normal position	Pilot air <sup>1)</sup>	Part No.	Type
Stem actuated valve							
80	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	<b>3626</b>	<b>V-3-M5</b>
		Suitable for vacuum	■	Open/closed	–	<b>10747</b>	<b>V/O-3-PK-3</b>
140 ... 147	4/2-way valve, monostable	–	■	–	–	<b>3394</b>	<b>VS-4-1/8</b>
140	3/2-way valve, monostable	Suitable for vacuum	■	Open/closed	–	<b>4938</b>	<b>V/O-3-1/8</b>
146 ... 154	3/2-way valve, monostable	–	■	Closed	–	<b>2334</b>	<b>VS-3-1/8</b>
141 ... 161	3/2-way valve, monostable	–	■	Open	–	<b>2952</b>	<b>VOS-3-1/8</b>
500	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	<b>555618</b>	<b>VMEM-ST-M32C-M-G18</b>
				Open	–	<b>555619</b>	<b>VMEM-ST-M32U-M-G18</b>
		–	■	Closed	Internal	<b>555620</b>	<b>VMEM-STC-M32C-M-G18</b>
					External	<b>555622</b>	<b>VMEM-STCZ-M32C-M-G18</b>
				Open	Internal	<b>555621</b>	<b>VMEM-STC-M32U-M-G18</b>
					External	<b>555623</b>	<b>VMEM-STCZ-M32U-M-G18</b>
		Suitable for vacuum, reverse operation	■	–	–	<b>555624</b>	<b>VMEM-S-M52-M-G18</b>
		(Internal) pneumatic reset	–	–	–	<b>555625</b>	<b>VMEM-S-M52-A-G18</b>
		Suitable for vacuum, reverse operation, (external) pneumatic reset	–	–	–	<b>555626</b>	<b>VMEM-S-M52-E-G18</b>
		–	■	–	Internal	<b>555627</b>	<b>VMEM-SC-M52-M-G18</b>
		Suitable for vacuum, reverse operation			External	<b>555629</b>	<b>VMEM-SCZ-M52-M-G18</b>
		–	–	–	Internal	<b>555628</b>	<b>VMEM-SC-M52-A-G18</b>
Suitable for vacuum, reverse operation	External	<b>555630</b>			<b>VMEM-SCZ-M52-E-G18</b>		
550	5/2-way valve, monostable	Suitable for vacuum	■	–	–	<b>6809</b>	<b>V-5-1/4-B</b>
600	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	<b>6808</b>	<b>V-3-1/4-B</b>
				Open	–	<b>9157</b>	<b>VO-3-1/4-B</b>
1000	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	<b>556901</b>	<b>VMEM-ST-M32C-M-G14</b>
				Open	–	<b>556902</b>	<b>VMEM-ST-M32U-M-G14</b>
	5/2-way valve, monostable	Suitable for vacuum, reverse operation	■	–	–	<b>556903</b>	<b>VMEM-S-M52-M-G14</b>
				–	–	<b>556904</b>	<b>VMEM-S-M52-A-G14</b>
				–	–	<b>556905</b>	<b>VMEM-S-M52-E-G14</b>
				–	Internal	<b>556906</b>	<b>VMEM-SC-M52-M-G14</b>
					External	<b>556908</b>	<b>VMEM-SCZ-M52-M-G14</b>
				–	–	–	Internal
Suitable for vacuum, reverse operation	External	<b>556909</b>	<b>VMEM-SCZ-M52-E-G14</b>				

1) With piloted valves





# Swivel lever valves

Technical data – Swivel lever valve, standard nominal flow rate 80 ... 140 l/min

-  - Flow rate  
80 ... 140 l/min

Mounting via through-holes

-  - Pressure  
-0.95 ... 8 bar

-  - Temperature range  
-10 ... +60 °C



General technical data			
Type	RW-3-M5	RW/O-3-PK-3	RW/O-3-1/8
Standard nominal flow rate [l/min] 1 → 2	80	80	140
Valve function	3/2-way valve	3/2-way valve	3/2-way valve
Design	Piston poppet valve, directly actuated	Piston poppet valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	M5	NW3 (barbed fitting)	G1/8
Nominal size [mm]	2	2.5	3.5
Weight [g]	65	40	150
Actuating force at 6 bar [N]	14.5	13.0 (RW) 16.0 (RWO)	28.0

Materials			
Type	RW-3-M5	RW/O-3-PK-3	RW/O-3-1/8
Seal	NBR	NBR	NBR
Housing	Die-cast zinc	POM	Anodised aluminium

Operating and environmental conditions			
Type	RW-3-M5	RW/O-3-PK-3	RW/O-3-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [-:-:-]		
Operating pressure range [bar]	-0.95 ... 8	0 ... 8	-0.95 ... 8
Temperature of medium [°C]	-10 ... +60		

Technical data – Actuator attachment for swivel lever valve RW/O-3-1/8				
Swivel lever, type	ASK-01 (short)	ASK-02 (short)	ASL-02 (long)	ASS-02 (rod)
Actuating force [N] Max.	-	7	Dependent on starting height	Dependent on starting height
Weight [g]	20	30	35	30

Materials – Swivel lever				
Swivel lever, type	ASK-01 (short)	ASK-02 (short)	ASL-02 (long)	ASS-02 (rod)
Material	GD-Zn	Aluminium, steel		

# Swivel lever valves


Technical data

FESTO


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Swivel lever valve RW/O-3-1/8

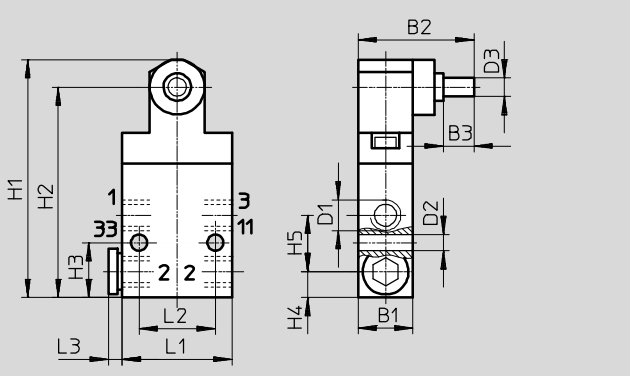


Swivel lever valve RW-3-M5

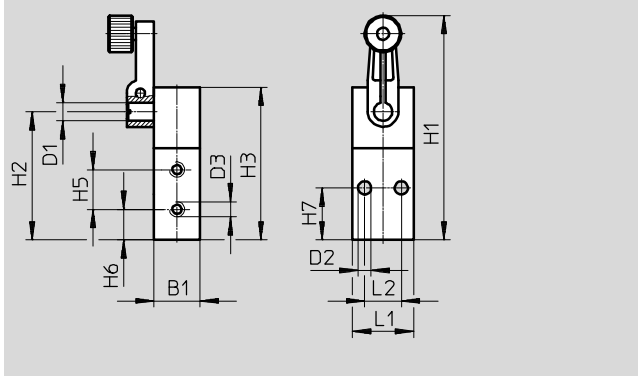


	B1	B2	B3	D1	D2	D3	L1	L2	L3	H1	H2	H3	H4	H5	H6	H7	H8	H9
RW/O-3-1/8 ...	18	38	10	G1/8	5.3	6	36	25	4.5	78	69	18	8.5	18.5	-	-	-	-
RW-3-M5	30	15	-	12	4.3	M5	20	12	-	73.5	70.5	50	25.5	15	10	13	10.6	3

Swivel lever valve RW/O-3-PK-3

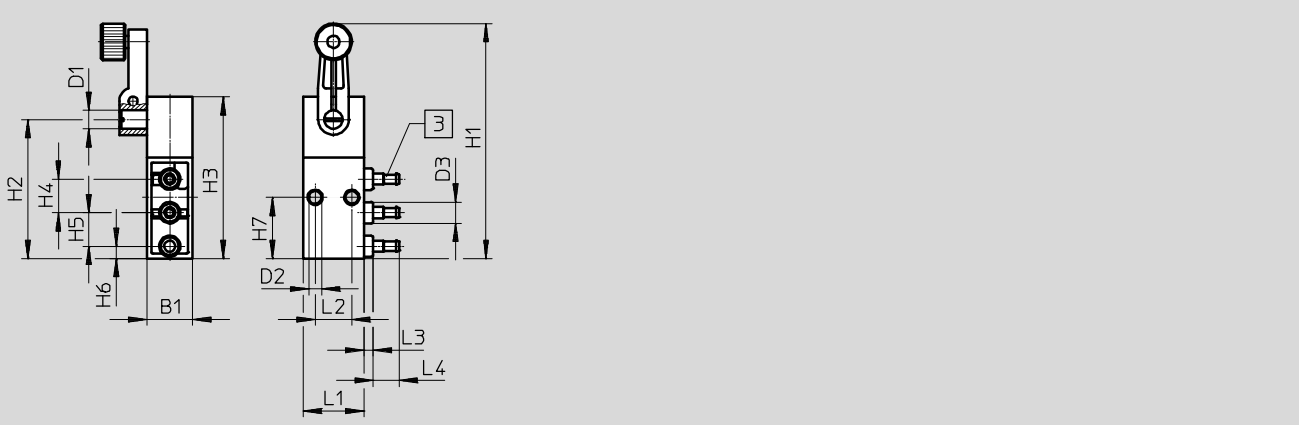


	B1	D1	D2	D3	L1	L2	L3	L4	H1	H2	H3	H4	H5	H6	H7	H8	H9
RW/O-3-PK-3	15	6	4.3	7	20	12	3	8.5	77	45,5	53	11	11	4	20	-	-

Mounting bracket HV-M5

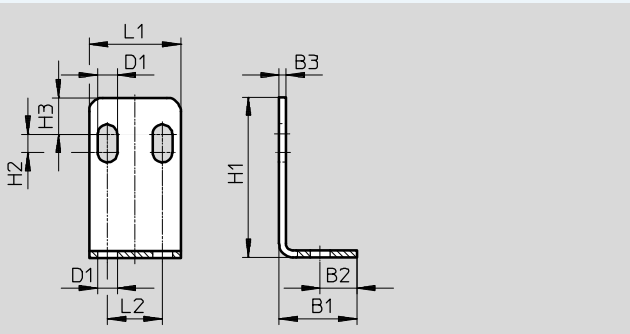

Mounting bracket HV-1/8

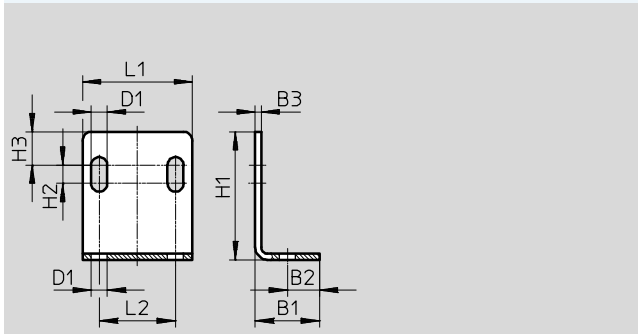


Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

# Swivel lever valves


Technical data

## Actuator attachment for swivel lever valve


Swivel lever, short ASK-01

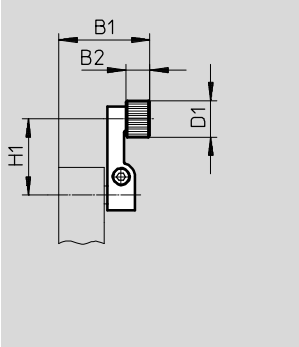


Swivel lever, short ASK-02

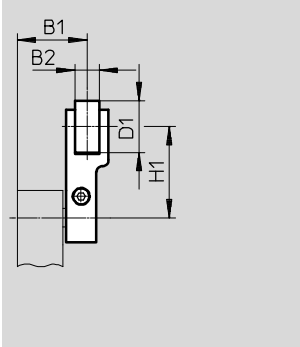

Swivel lever, long ASL-02

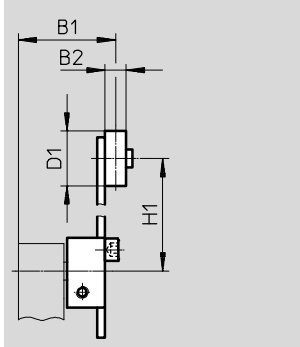


Swivel lever rod ASS-02




Actuator attachment	B1	B2	D1	D2	H1
ASK-01	30	8	12	-	25
ASK-02	23	8	17	-	30
ASL-02	32	7	18	-	25 ... 85
ASS-02	21	-	-	4	30 ... 140

## Actuating ranges are set by converting the switching head


Default settings (upon delivery)

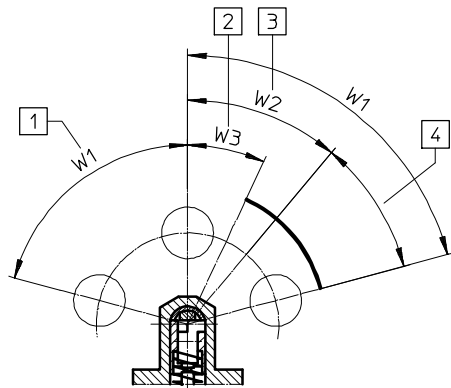

Valve components 1 and 2 turned 90° around the longitudinal axis

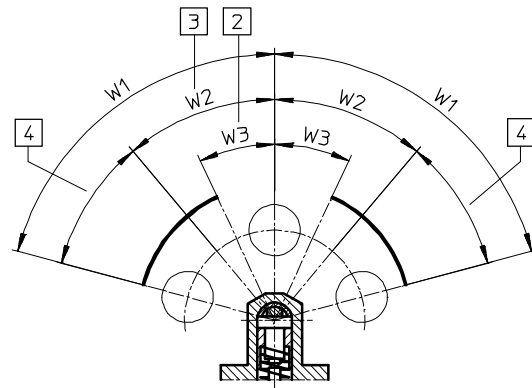

Valve components 1 and 2 turned 180° around the longitudinal axis




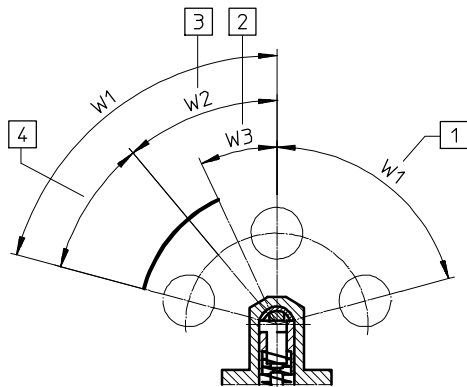


- 1 (w1) Idling, or max. angle position (75°)
- 2 (w3) Start of opening (25° ± 8°)
- 3 (w2) Max. opening angle (40° ± 5°)
- 4 Overtravel

# Swivel lever valves

Technical data




Ordering data						
Nominal flow rate [l/min]	Valve function	Description	Mechanical reset	Normal position	Part No.	Type
Swivel lever valve						
80	3/2-way valve, monostable	Suitable for vacuum	■	Closed	<b>4031</b>	<b>RW-3-M5</b>
80	3/2-way valve, monostable	Not suitable for vacuum	■	Open/closed	<b>10750</b>	<b>RW/O-3-PK-3</b>
140	3/2-way valve, monostable	Suitable for vacuum	■	Open/closed	<b>4937</b>	<b>RW/O-3-1/8</b>

Ordering data					
	Description	Part No.	Type	PU <sup>1)</sup>	
Actuator attachment					
	Short swivel lever, version 1	<b>13248</b>	<b>ASK-01</b>	<b>1</b>	
	Short swivel lever, version 2	<b>5835</b>	<b>ASK-02</b>	<b>1</b>	
	Long swivel lever	<b>5836</b>	<b>ASL-02</b>	<b>1</b>	
	Swivel lever rod	<b>4789</b>	<b>ASS-02</b>	<b>1</b>	

1) Packaging unit

# Whisker valves

Technical data – Whisker valve, standard nominal flow rate 146 ... 175 l/min

-  Flow rate  
146 ... 175 l/min
-  Pressure  
3.5 ... 8 bar
-  Temperature range  
-10 ... +60 °C

Mounting via through-holes



General technical data		
Type	FVS-3-1/8	FVSO-3-1/8
Version	Whisker valve	
Standard nominal flow rate [l/min] 1 → 2	146	175
Valve function	3/2-way valve, closed, monostable	3/2-way valve, open, monostable
Exhaust air	Flow control	
Design	Disk seat valve, piloted	
Direction of flow	Non-reversible	
Sealing principle	Soft	
Mounting position	Any	
Pneumatic connection	G1/8	
Nominal size [mm]	3.5	
Weight [g]	130	
Actuating force [N] at 6 bar	→ Graph	
Repetition accuracy of switching point [mm]	±0.1	

Materials	
Seal	NBR
Housing	Anodised aluminium
Note on materials	RoHS-compliant

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [-:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	3.5 ... 8
Temperature of medium [°C]	-10 ... +60
Ambient temperature [°C]	-10 ... +60
Corrosion resistance class CRC <sup>1)</sup>	2

1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


# Whisker valves

Technical data

FESTO

## Switching forces F and switching travel l at 6 bar as a function of approach distance L

Whisker valve

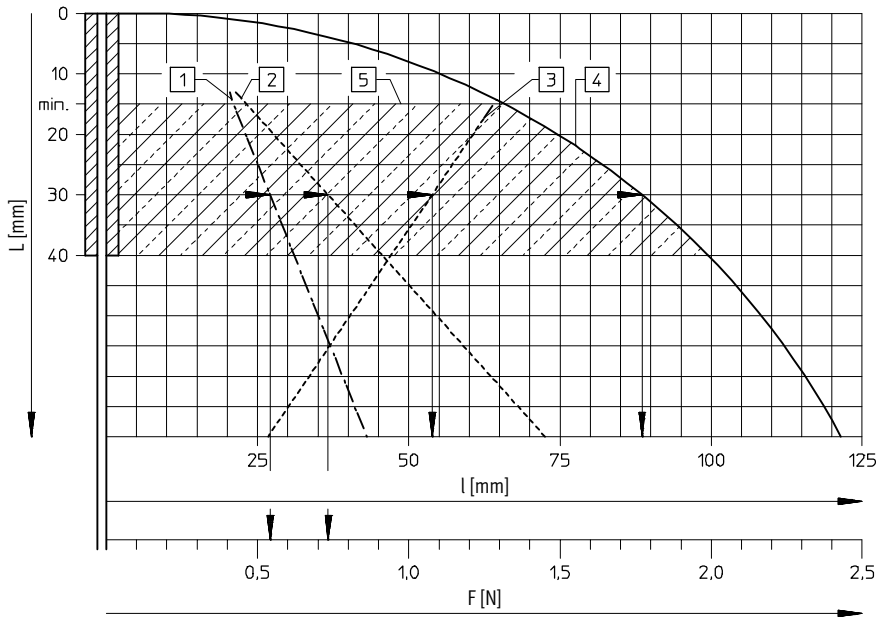

This piloted valve with extremely low actuating forces is particularly suited for systems where dissimilar parts or actuating elements without precision positioning are to be sensed, or where the actuating levels are different. The whisker can be approached from any direction perpendicular to the whisker axis, or can be passed.

- 1 Switching force
- 2 Passing force
- 3 Switching travel
- 4 Overtravel
- 5 Permissible approach range

Example:

A distance of 30 mm from the end of the spring results in:

Switching travel 54 mm  
Switching force 0.57 N

Overtravel 88 mm  
Passing force 0.75 N


# Whisker valves

Technical data

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Whisker valve FVS, FVSO

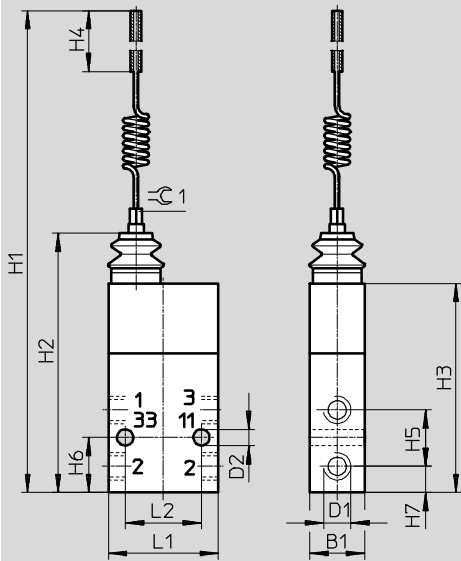

Whisker valve	B1	D1	D2	H1	H2	H3	H4 max.	H5	H6	H7	L1	L2	∠ 1
FVS, FVSO	18	G1/8	5.3	220	85	68.5	40	18.5	18	8.5	36	25	4

## Ordering data


Nominal flow rate [l/min]	Valve function	Description	Mechanical reset	Normal position	Pilot air <sup>1)</sup>	Part No.	Type
Whisker valve							
146	3/2-way valve, monostable	Whisker valve	■	Closed	Internal	<b>3876</b>	<b>FVS-3-1/8</b>
175	3/2-way valve, monostable	Whisker valve	■	Open	Internal	<b>3877</b>	<b>FVSO-3-1/8</b>

1) With piloted valves


# Roller lever valves with idle return, toggle lever valves


FESTO


Technical data – Roller lever valve with idle return, toggle lever valve, standard nominal flow rate 80 ... 175 l/min

-  - Flow rate  
80 ... 600 l/min

Mounting via through-holes

-  - Pressure  
-0.95 ... 8 bar

-  - Temperature range  
-10 ... +60 °C

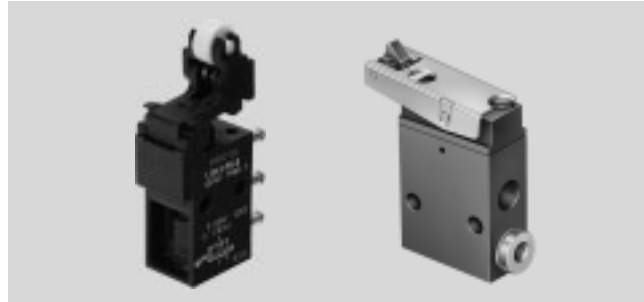

General technical data					
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8	LOS-3-1/8	LS-4-1/8
Version	Roller lever valve with idle return		Toggle lever valve		
Standard nominal flow rate [l/min] 1 → 2	80		146	175	128
Valve function	3/2-way valve		3/2-way valve	3/2-way valve	4/2-way valve
Design	Disk seat valve, directly actuated		Disk seat valve, piloted		
Direction of flow	-	-	Non-reversible		
Sealing principle	-		Soft		
Mounting position	-		Any		
Pneumatic connection	PK-3 <sup>1)</sup>	M5	G1/8	G1/8	G1/8
Nominal size [mm]	2.5	2	3.5	3.5	3.5
Weight [g]	19	43	110	110	220
Actuating force [N]	-	16.5	1.7	1.8	2.2
• at 6 bar					
• with normally closed position	[N] 10.0	-	-	-	-
• with normally open position	[N] 13.0	-	-	-	-

1) Barbed fitting for plastic tubing with 3 mm nominal diameter

Materials					
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8	LOS-3-1/8	LS-4-1/8
Seal	NBR				
Housing	POM	Die-cast zinc	Anodised aluminium		
Note on materials	-		RoHS-compliant		

Operating and environmental conditions					
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8	LOS-3-1/8	LS-4-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [--:--]				
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)				
Operating pressure range [bar]	0 ... 8	-0.95 ... 8	3.5 ... 8		
Temperature of medium [°C]	-	-	-10 ... +60		
Ambient temperature [°C]	-10 ... +60				
Corrosion resistance class CRC <sup>1)</sup>	-	-	2		

1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



## Roller lever valves with idle return, toggle lever valves

FESTO

Technical data – Roller lever valve with idle return, toggle lever valve, standard nominal flow rate 550 ... 600 l/min

General technical data			
Type	L-5-1/4-B	L-3-1/4-B	LO-3-1/4-B
Version	Toggle lever valve	Toggle lever valve	Toggle lever valve
Standard nominal flow rate [l/min] 1 → 2	550	600	600
Valve function	5/2-way valve	3/2-way valve, closed	3/2-way valve, open
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4	G1/4
Nominal size [mm]	7.0	7.0	7.0
Weight [g]	360	250	250
Actuating force [N]	71.5	24.5	50.0

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Ambient temperature [°C]	-10 ... +60

# Roller lever valves with idle return, toggle lever valves

Technical data

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

Roller lever valve with idle return L/O-3-PK-3

2 Barbed fitting for tubing I.D. 3 mm  
 3 Max. opening  
 4 Start of opening  
 5 Max. stroke  
 7 Actuation direction

Roller lever valve with idle return L-3-M5

1 Switching travel  
 7 Actuation direction

Roller lever valve with idle return L-3-1/4-B, LO-3-1/4-B

3 Start of opening  
 4 Max. opening  
 5 Max. stroke  
 6 Cam operating path  
 7 Actuation direction

Roller lever valve with idle return L-5-1/4-B

3 Start of opening  
 4 Max. opening  
 5 Max. stroke  
 6 Cam operating path  
 7 Actuation direction

Roller lever valve with idle return	B3	B4	D7	D8	L3	L4	L6	L7	L8	L9
L/O-3-PK-3	4.8	-	10	-	-	-	23	-	-	-
L-3-M5	-	-	-	-	14.5	8.5	23	-	-	-
L-3-1/4-B, LO-3-1/4-B	-	8	-	17	-	-	9	55	54	31
L-5-1/4-B	-	8	-	17	-	-	9	55	54	31

Roller lever valve with idle return	H10	H12	H13	H14	H15	H16	H17	H18	H19	H20	W1	W2
L/O-3-PK-3	-	-	10.5	22.3	23.2	59.5	24	-	-	-	30°	-
L-3-M5	3	-	52.5	-	-	55.5	-	-	-	-	30°	-
L-3-1/4-B, LO-3-1/4-B	-	62.5	7.4	-	-	102	6.3	4.1	10	7	-	50°
L-5-1/4-B	-	62.5	7.4	-	-	102	6.3	4.1	10	7	-	50°


# Roller lever valves with idle return, toggle lever valves

Technical data


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Toggle lever valve LS-3-1/8, LOS-3-1/8

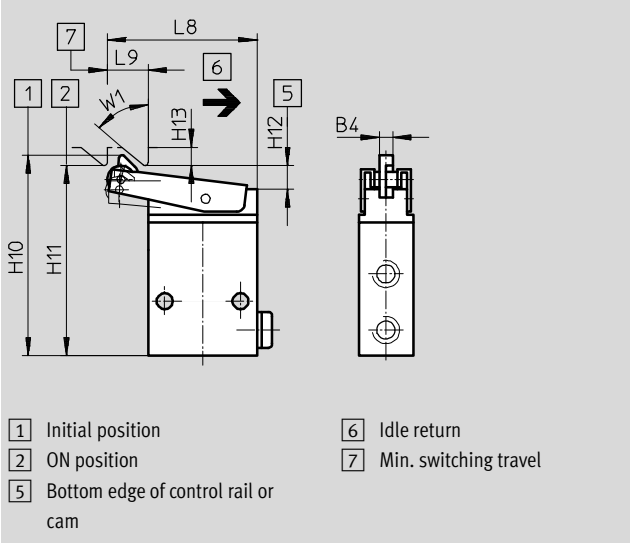


Toggle lever valve LS-4-1/8

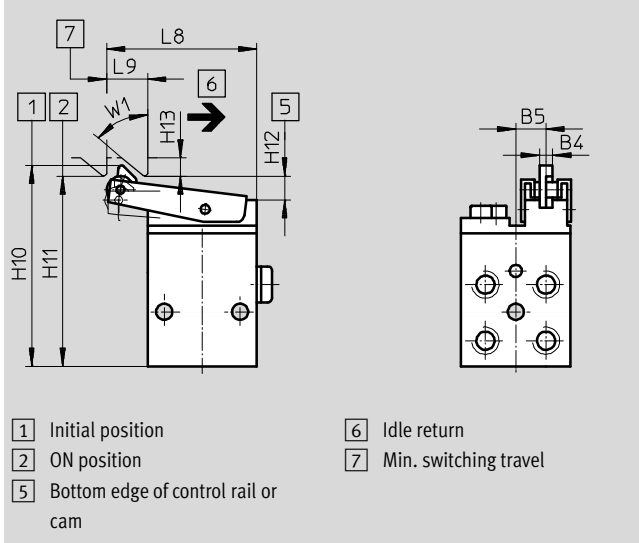


Toggle lever valve	B4	B5	L8	L9	H10	H11	H12 +0.2, -0.3	H13	W1
LS-3-1/8, LOS-3-1/8	4.4	-	49.5	13.5	66	62.5	7.5	6	50°
LS-4-1/8	4.4	9	49.5	13.5	66	62.5	7.5	6	50°

Mounting bracket HV-M5

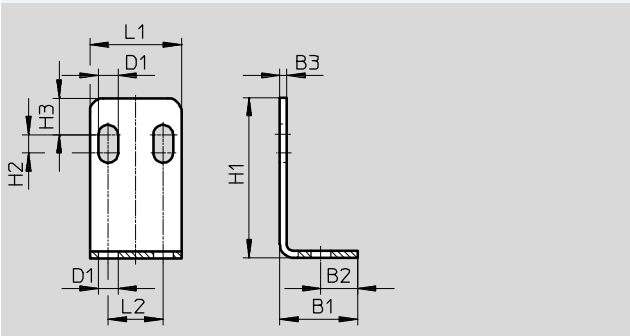

Mounting bracket HV-1/8

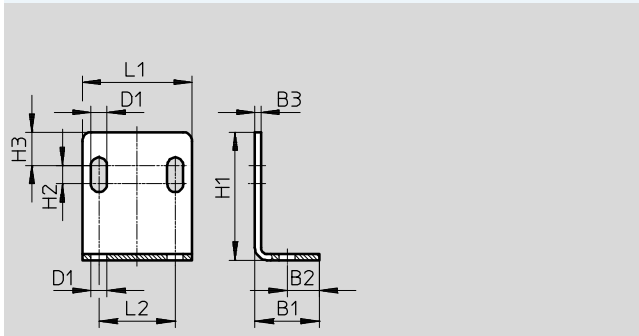


Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

# Roller lever valves with idle return, toggle lever valves

Ordering data


Ordering data						
Nominal flow rate [l/min]	Valve function	Description	Mechanical reset	Normal position	Part No.	Type
<b>Toggle lever valve</b>						
128	4/2-way valve, monostable	Toggle lever valve	■	–	<b>3416</b>	<b>LS-4-1/8</b>
146	3/2-way valve, monostable	Toggle lever valve	■	Closed	<b>2186</b>	<b>LS-3-1/8</b>
175	3/2-way valve, monostable	Toggle lever valve	■	Open	<b>2950</b>	<b>LOS-3-1/8</b>
<b>Roller lever valve with idle return</b>						
80	3/2-way valve, monostable	Roller lever valve with idle return	■	Open/closed	<b>10749</b>	<b>L/O-3-PK-3</b>
		Roller lever valve with idle return, suitable for vacuum		Closed	<b>3628</b>	<b>L-3-M5</b>
550	5/2-way valve, monostable	Roller lever valve with idle return, suitable for vacuum	■	–	<b>8993</b>	<b>L-5-1/4-B</b>
600	3/2-way valve, monostable	Roller lever valve with idle return, suitable for vacuum	■	Closed	<b>8982</b>	<b>L-3-1/4-B</b>
				Open	<b>8989</b>	<b>LO-3-1/4-B</b>

Ordering data				
	Description	Part No.	Type	PU <sup>1)</sup>
<b>Actuator attachment</b>				
	For roller lever valve with idle return L-3-M5, roller lever with idle return with mounting screws	<b>6513</b>	<b>AL-05</b>	<b>1</b>


1) Packaging unit


# Roller lever valves, roller actuated valves


Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 80 ... 170 l/min

-  - Flow rate  
80 ... 500 l/min

Mounting either via through-holes or  
on front panel

-  - Pressure  
-0.95 ... 10 bar

-  - Temperature range  
-10 ... +60 °C

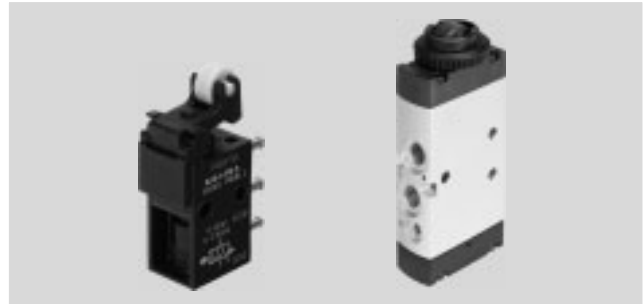

General technical data					
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8	ROS-3-1/8	RS-4-1/8
Version	Roller lever valve				
Standard nominal flow rate [l/min] 1 → 2	80		151	169	128
Valve function	3/2-way valve, open/closed		3/2-way valve	3/2-way valve	4/2-way valve
Exhaust air	-	-	Flow control		
Design	Disk seat valve, directly actuated		Disk seat valve, piloted		
Direction of flow	-	-	Non-reversible		
Sealing principle	-	-	Soft		
Mounting position	-	-	Any		
Note on forced checking procedure	-	-	Min. 1/year		
Pneumatic connection	PK-3 <sup>1)</sup>	M5	G1/8	G1/8	G1/8
Nominal size [mm]	2.5	2	3.5	3.5	3.5
Weight [g]	18	40	120	120	230
Actuating force [N]	-	16.5	1.7	1.9	1.8
• at 6 bar					
• with normally closed position	[N]	10.0	-	-	-
• with normally open position	[N]	15.0	-	-	-

1) Barbed fitting for plastic tubing with 3 mm nominal diameter

## Roller lever valves, roller actuated valves

FESTO

Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 80 ... 170 l/min

Materials					
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8	ROS-3-1/8	RS-4-1/8
Seal	NBR				
Housing	POM	Die-cast zinc	Anodised aluminium		
Note on materials	–	–	RoHS-compliant		

Operating and environmental conditions					
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8	ROS-3-1/8	RS-4-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [–:–:–]				
Note about operating/pilot medium	Lubricated operation possible (required during subsequent operation)				
Operating pressure range [bar]	0 ... 8	–0.95 ... 8	3.5 ... 8	3.5 ... 8	3.5 ... 8
Temperature of medium [°C]	–	–	–10 ... +60		
Ambient temperature [°C]	–10 ... +60				
Corrosion resistance class CRC <sup>1)</sup>	–	–	2		

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Technical data – Actuator attachment		
Type	AR-01	AL-01
Version	Roller lever	Roller lever with idle return
Actuating force [N]	Max. 10	12
Weight [g]	42	52

Materials – Actuator attachment	
Actuator attachment	Galvanised steel

## Roller lever valves, roller actuated valves

FESTO

Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 550 ... 600 l/min

General technical data			
Type	R-5-1/4-B	R-3-1/4-B	RO-3-1/4-B
Version	Roller lever valve	Roller lever valve	Roller lever valve
Standard nominal flow rate [l/min] 1 → 2	550	600	600
Valve function	5/2-way valve	3/2-way valve, closed	3/2-way valve, open
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4	G1/4
Nominal size [mm]	7.0	7.0	7.0
Weight [g]	340	230	230
Actuating force [N]	75.0	26.0	48.0

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [-:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Ambient temperature [°C]	-10 ... +60

# Roller lever valves, roller actuated valves

Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 500 l/min

General technical data			
Type		VMEM-DT	VMEM-D
Standard nominal flow rate	[l/min]	500	
1 → 2			
Valve function		3/2-way valve	5/2-way valve
Reset method		Mechanical spring	Mechanical or pneumatic spring
Design		Disk seat valve, directly actuated	Piston spool valve, directly actuated
Pneumatic connection		G $\frac{1}{8}$	G $\frac{1}{8}$
Pilot air supply		–	–
Nominal size	[mm]	4.0	4.0
Weight	[g]	160	176
Max. switching frequency	[Hz]	2	2
Max. actuating speed			
• Axial actuation	[m/s]	0.6	0.6
• Lateral actuation	[m/s]	0.2	0.2
Actuating force	[N]	90 <sup>1)</sup> 130	27.5 <sup>2)</sup> 41
Max. actuating force	[N]	80	150
Max. lateral force	[N]	30	30

- 1) Value 90 with normally closed valve, value 130 with normally open valve  
 2) Value 27.5 with mechanical spring reset method, value 41 with pneumatic spring reset method

Materials	
Cover	PA
Seal	NBR
Housing	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant

Operating and environmental conditions			
Type		VMEM-DT	VMEM-D
Operating medium		Compressed air to ISO 8573-1:2010 [7:-:-]	
Note on operating/ pilot medium	[ $\mu$ m]	Lubricated operation possible (required during subsequent operation)	
Operating pressure range	[bar]	–0.95 ... 8	–0.95 ... 10 <sup>1)</sup>   2.5 ... 10 <sup>2)</sup>
Pilot pressure	[bar]	–	2.5 ... 10 <sup>3)</sup>
Temperature of medium	[°C]	–10 ... +60	
Ambient temperature	[°C]	–10 ... +60	
Corrosion resistance class CRC <sup>4)</sup>		2	

- 1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)  
 2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)  
 3) With VMEM-D ... E ...  
 4) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.




# Roller lever valves, roller actuated valves

Technical data


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


Roller lever valve R/O-3-PK-3

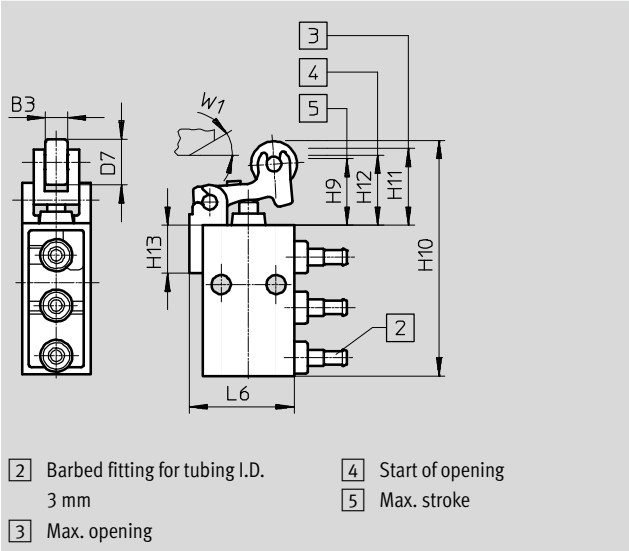


Roller lever valve R-3-M5

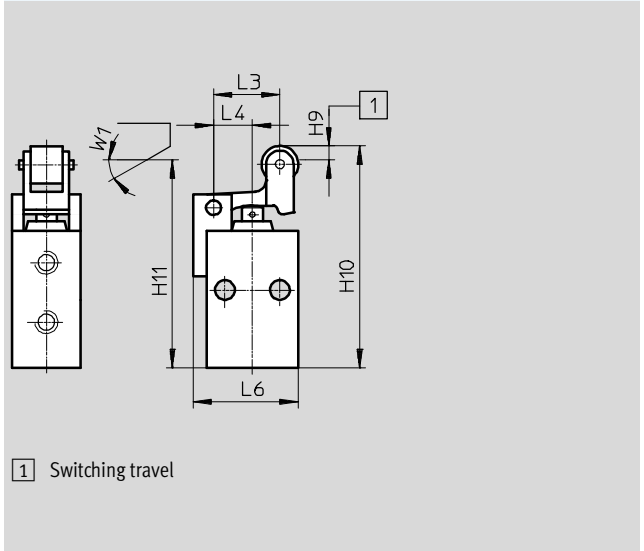

Roller lever valve R-3-1/4-B, RO-3-1/4-B

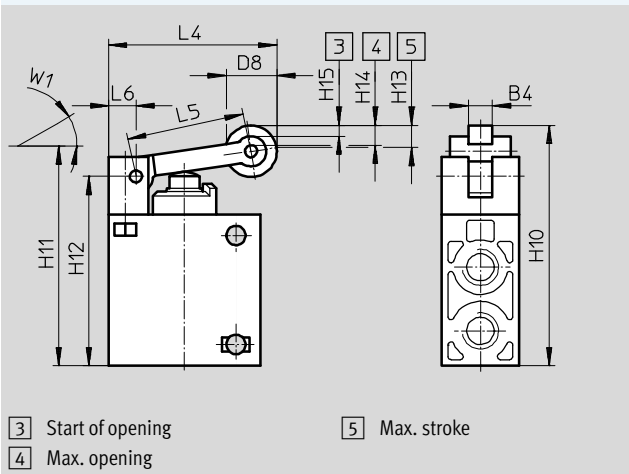

Roller lever valve R-5-1/4-B

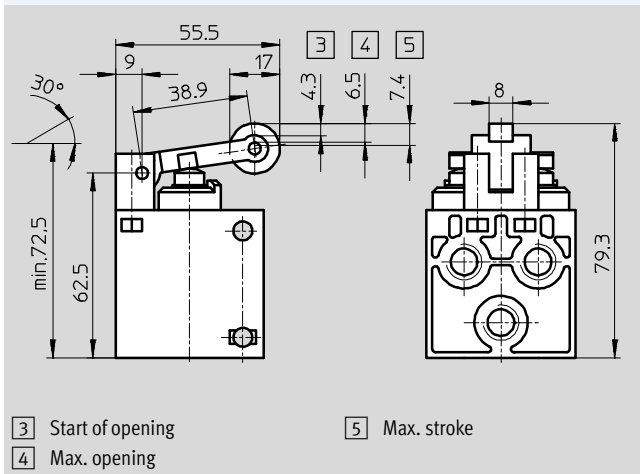

Roller lever valve	B3	B4	D7	D8	L3	L4	L5	L6
R/O-3-PK-3	4.8	-	10	-	-	-	-	23
R-3-M5	-	-	-	-	14.5	8.5	-	23
R-3-1/4-B, RO-3-1/4-B	-	8	-	17	-	55.5	39	9
R-5-1/4-B	-	8	-	17	-	55.5	39	9

Roller lever valve	H9	H10	H11	H12	H13	H14	H15	W1
R/O-3-PK-3	14.5	51.5	16.8	18.5	10.5	-	-	30°
R-3-M5	3	48.5	45.5	-	-	-	-	30°
R-3-1/4-B, RO-3-1/4-B	-	79.3	min. 72.5	62.5	7.4	6.5	4.3	30°
R-5-1/4-B	-	79.3	min. 72.5	62.5	7.4	6.5	4.3	30°

# Roller lever valves, roller actuated valves


Technical data

FESTO


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


### Basic valve, stem actuated valve V/O-3-1/8

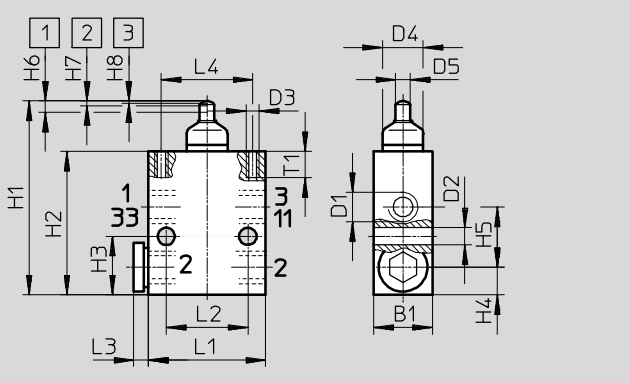

### Roller lever AR-01 as actuator attachment for stem actuated valve V/O-3-1/8

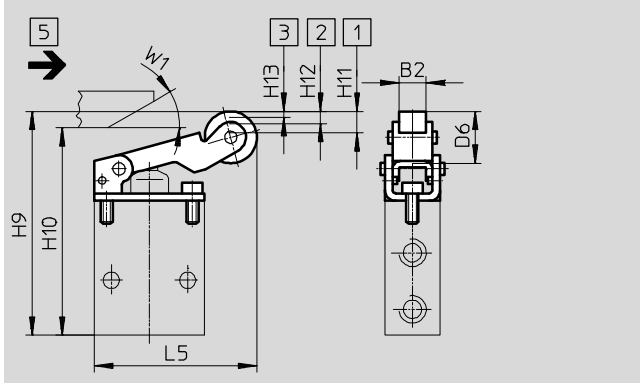

### Roller lever with idle return AL-01 as actuator attachment for stem actuated valve V/O-3-1/8

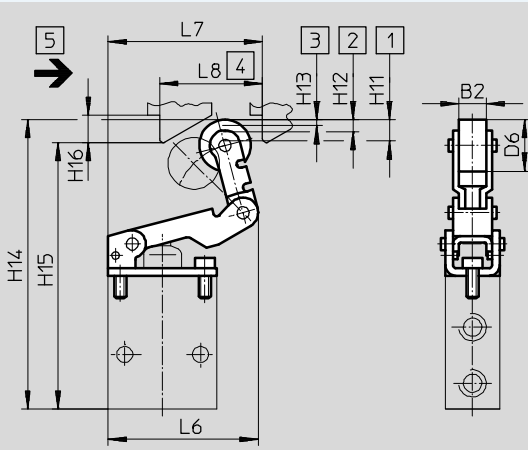

- 1 Max. stroke
- 2 Max. opening
- 3 Start of opening
- 4 Min. actuation stroke
- 5 Actuation direction

- Note

The stem actuated valve V/O-3-1/8 can be extended with an actuator attachment for the roller lever or

toggle lever valve. The technical data is listed with the stem actuated valve.

Stem actuated valve	B1	D1	D2	D3	D4	D5	L1	L2	L3	L4	H1	H2	H3	H4	H5	H6	H7 ±0.2	H8 ±0.2	T1
V/O-3-1/8	18	G1/8	5.3	M4	12.5	4.5	36	25	4.5	28	59.5	44	18	8.5	18.5	3.5	1.4	0.6	8

Actuator attachment	B2	D6	L5	L6	L7	L8	H9	H10 min.	H11	H12 +0.2	H13 +0.2	H14	H15 min.	H16	W1
AR-01	8	17	54	-	-	-	71	64	7	4	2	-	-	-	30°
AL-01	8	17	-	50.5	51	34	-	-	7	4	2	93.5	86.5	9	-


# Roller lever valves, roller actuated valves

Technical data

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

Roller lever valve RS-3-1/8, ROS-3-1/8

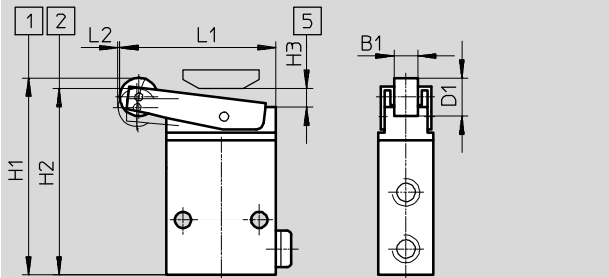

- 1 Initial position
- 2 ON position
- 5 Bottom edge of control rail or cam


Roller lever valve RS-4-1/8

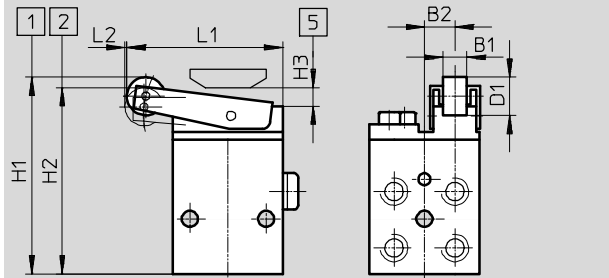


- 1 Initial position
- 2 ON position
- 5 Bottom edge of control rail or cam

Roller lever valve	B1	B2	D1	L1	L2	H1	H2	H3
RS-3-1/8, ROS-3-1/8	7.7	-	12.5	51.5	0.5	64.5	61	6 +0.2, -0.3
RS-4-1/8	7.7	9	12.5	51.5	0.5	64.5	61	6

Mounting bracket HV-M5

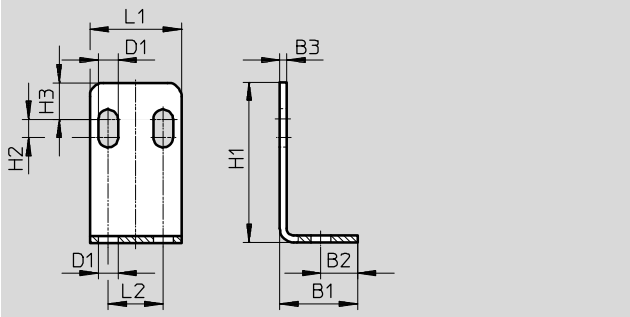

Mounting bracket HV-1/8

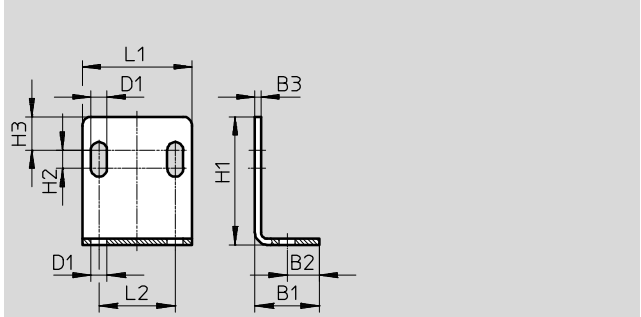

Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

# Roller lever valves, roller actuated valves


Technical data

FESTO

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Roller actuated valve VMEM-DT...32...G18

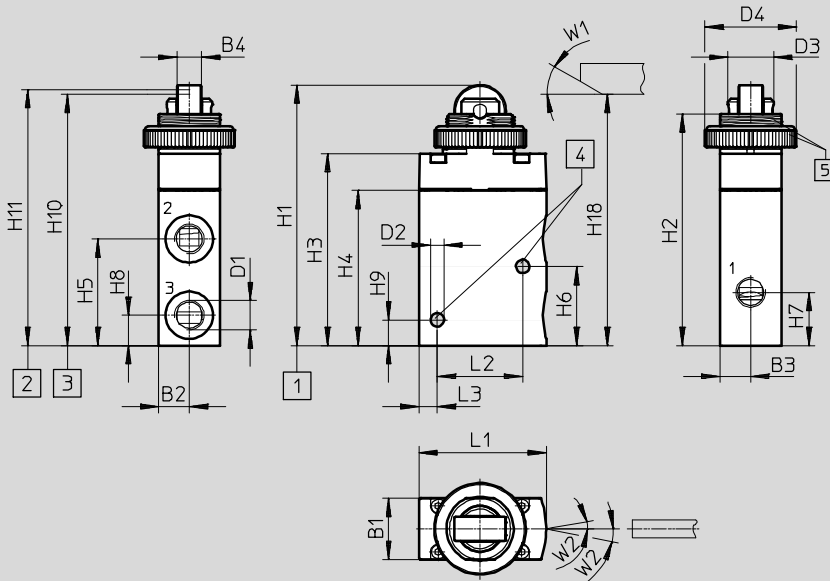

- 1 Maximum stroke
- 2 Start of opening
- 3 ON position
- 4 Mounting holes
- 5 Thread and nut (M22x1)

Roller actuated valve	B1	B2	B3	B4	D1	D2	D3	D4	L1	L2	L3	W1	W2
VMEM-DT...32...G18	20	10	10	8	G1/8	4.4	15	30	41.7	28	6	30°	5°

Roller actuated valve	H1±0.3	H2	H3	H4	H5	H6	H7	H8	H9	H10±0.4	H11±0.3	H18±0.3
VMEM-DT...32...G18	85.8	76	63	51	35	26	18	10	8.5	82.6	84	82.5


# Roller lever valves, roller actuated valves

Technical data

**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)

Roller actuated valve VMEM-D...52...G18

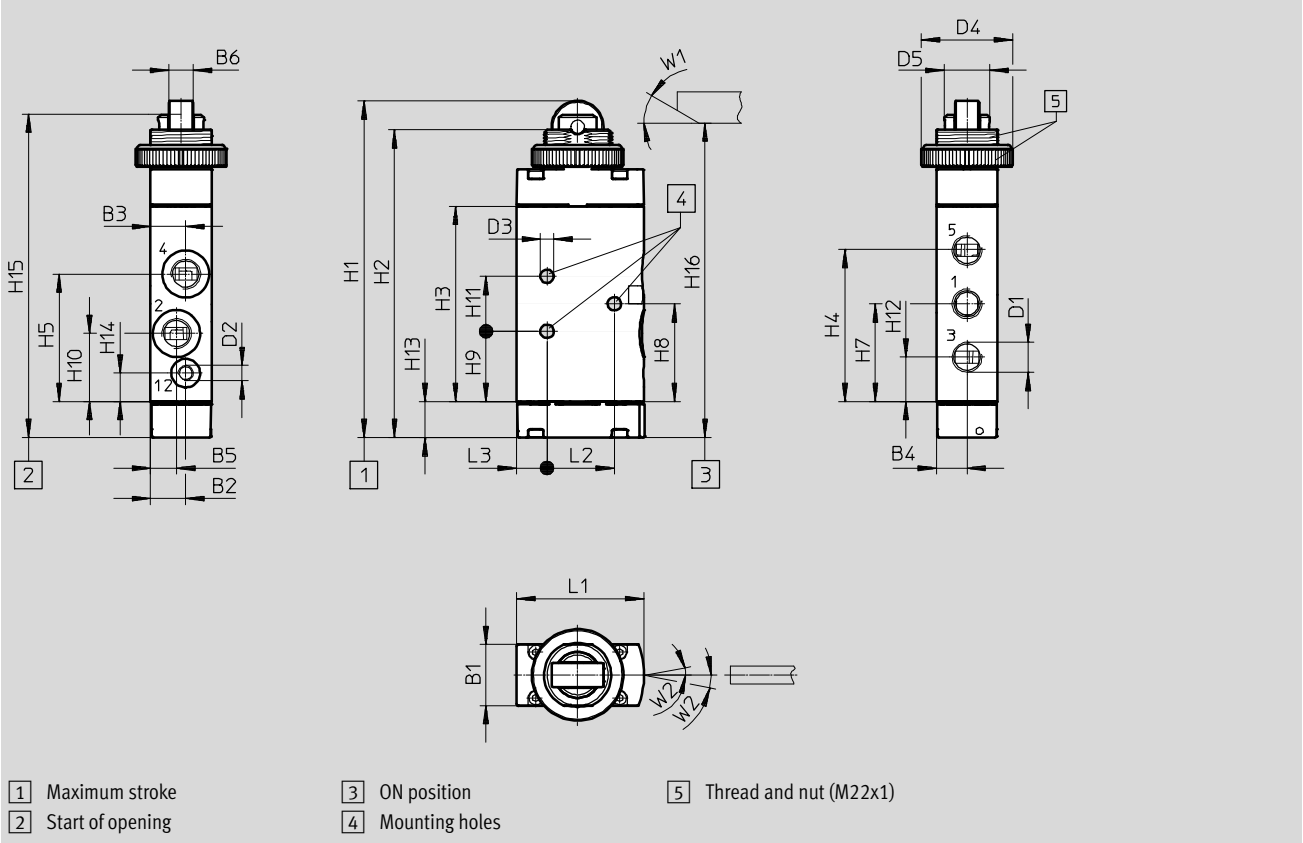

Roller actuated valve	B1	B2	B3	B4	B5	B6	D1	D2	D3	D4	D5	L1	L2	L3	W1	W2
VMEM-D...52...G18	20	11.5	11.5	10	8.5	8	G $\frac{1}{8}$	M5	4.4	30	15	41.7	25	7	30°	5°




Roller actuated valve	H1±0.3	H2	H3	H4	H5	H7	H8	H9	H10	H11	H12	H13	H14	H15±1	H16±0.2
VMEM-D...52...G18	110.6	101.1	64	49.5	41.8	32	32	23	22.3	18	14.5	11.8	9.3	106.6	103

# Roller lever valves, roller actuated valves

FESTO

Ordering data

Ordering data						
Nominal flow rate [l/min]	Valve function	Description	Mechanical reset	Normal position	Part No.	Type
<b>Roller lever valve</b>						
80	3/2-way valve, monostable	Roller lever valve	■	Open/closed	<b>10748</b>	<b>R/O-3-PK-3</b>
				Closed	<b>3629</b>	<b>R-3-M5</b>
128	4/2-way valve, monostable	Roller lever valve	■	–	<b>2949</b>	<b>RS-4-1/8</b>
151	3/2-way valve, monostable	Roller lever valve	■	Closed	<b>2272</b>	<b>RS-3-1/8</b>
169	3/2-way valve, monostable	Roller lever valve	■	Open	<b>2270</b>	<b>ROS-3-1/8</b>
550	5/2-way valve, monostable	Roller lever valve, suitable for vacuum	■	–	<b>8996</b>	<b>R-5-1/4-B</b>
600	3/2-way valve, monostable	Roller lever valve, suitable for vacuum	■	Closed	<b>8985</b>	<b>R-3-1/4-B</b>
				Open	<b>8991</b>	<b>RO-3-1/4-B</b>
<b>Roller actuated valve</b>						
500	3/2-way valve, monostable	Roller actuated valve, suitable for vacuum	■	Closed	<b>563386</b>	<b>VMEM-DT-M32C-M-G18</b>
				Open	<b>563387</b>	<b>VMEM-DT-M32U-M-G18</b>
	5/2-way valve, monostable	Roller actuated valve, suitable for vacuum, reverse operation	■	–	<b>563390</b>	<b>VMEM-D-M52-M-G18</b>
				–	<b>563388</b>	<b>VMEM-D-M52-A-G18</b>
–	Roller actuated valve, suitable for vacuum, reverse operation	–	–	<b>563389</b>	<b>VMEM-D-M52-E-G18</b>	

Ordering data					
	Description	Part No.	Type	PU <sup>1)</sup>	
<b>Actuator attachment</b>					
	For stem actuated valve V/O-3-1/8, roller lever	<b>4936</b>	<b>AR-01</b>	<b>1</b>	
	For stem actuated valve V/O-3-1/8, roller lever with idle return	<b>4941</b>	<b>AL-01</b>	<b>1</b>	
	For roller lever valve R-3-M5, roller lever with mounting screws	<b>6512</b>	<b>AR-05</b>	<b>1</b>	

1) Packaging unit

# Valves, mechanically actuated

Accessories

**FESTO**

Ordering data					
	Description		Part No.	Type	PU <sup>1)</sup>
<b>Push-in fitting with external hex (Mini version)</b>					
	Connecting thread M5 for tubing O.D.	3 mm	153302	QSM-M5-3	10
		4 mm	153304	QSM-M5-4	10
		6 mm	153306	QSM-M5-6	10
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186264	QSM-G $\frac{1}{8}$ -4	10
		6 mm	186265	QSM-G $\frac{1}{8}$ -6	10
<b>Push-in fitting with external hex (Standard version)</b>					
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186095	QS-G $\frac{1}{8}$ -4	10
		6 mm	186096	QS-G $\frac{1}{8}$ -6	10
	Connecting thread G $\frac{1}{4}$ for tubing O.D.	6 mm	186097	QS-G $\frac{1}{4}$ -6	10
		8 mm	186099	QS-G $\frac{1}{4}$ -8	10
		10 mm	186101	QS-G $\frac{1}{4}$ -10	10
<b>Push-in fitting with internal hex (Mini version)</b>					
	Connecting thread M5 for tubing O.D.	3 mm	153313	QSM-M5-3-I	10
		4 mm	153315	QSM-M5-4-I	10
		6 mm	153315	QSM-M5-6-I	10
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186266	QSM-G $\frac{1}{8}$ -4-I	10
		6 mm	186267	QSM-G $\frac{1}{8}$ -6-I	10
<b>Push-in fitting with internal hex (Standard version)</b>					
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186106	QS-G $\frac{1}{8}$ -4-I	10
		6 mm	186107	QS-G $\frac{1}{8}$ -6-I	10
		8 mm	186109	QS-G $\frac{1}{8}$ -8-I	10
	Connecting thread G $\frac{1}{4}$ for tubing O.D.	6 mm	186108	QS-G $\frac{1}{4}$ -6-I	10
		8 mm	186110	QS-G $\frac{1}{4}$ -8-I	10
		10 mm	186112	QS-G $\frac{1}{4}$ -10-I	10
<b>Silencer</b>					
	Connecting thread	G $\frac{1}{8}$	2307	U- $\frac{1}{8}$	1
			161419	UC- $\frac{1}{8}$	1
		G $\frac{1}{4}$	2316	U- $\frac{1}{4}$	1
			6842	U- $\frac{1}{4}$ -B	1
			165004	UC- $\frac{1}{4}$	1
<b>Mounting bracket</b>					
	For valves with push-in connector and threaded connection M5	11 g	9634	HV-M5	1
	For valves with push-in connector and threaded connection G $\frac{1}{8}$	32 g	9635	HV- $\frac{1}{8}$	1

1) Packaging unit