



Universal converter

9116A

- Input for RTD, TC, Ohm, potentiometer, mA and V
- Supply for 2-wire transmitters
- Active / passive mA output and relay output
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



Advanced features

- Configuration and monitoring by way of detachable display front (PR 4511/4501); process calibration, signal and relay simulation.
- Advanced relay configuration, e.g. setpoint, window, delay, sensor error indication and power monitoring.
- Copying of the configuration from one device to others of the same type via the display front.
- TC inputs with internal CJC or external CJC for higher accuracy.
- Active / passive mA output via the same two terminals.

Application

- The device can be mounted in and receive signals from non-classified area and zone 2.
- Conversion and scaling of temperature, voltage, potentiometer and linear resistance signals.
- Power supply and signal isolator for 2-wire transmitters.
- Monitoring of error events and cable breakage via the individual status relay and/or a collective electronic signal via the power rail.
- 9116A has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.



Technical characteristics

- 1 green and 1 red front LED indicate operation status and malfunction. 1 yellow LED indicates relay status.
- 2.6 kVAC galvanic isolation between input, output and supply.

Mounting

- The devices can be mounted vertically or horizontally without distance between neighbouring units.

Applications

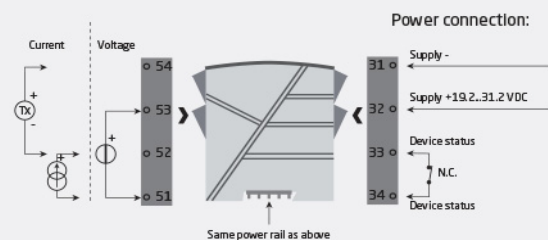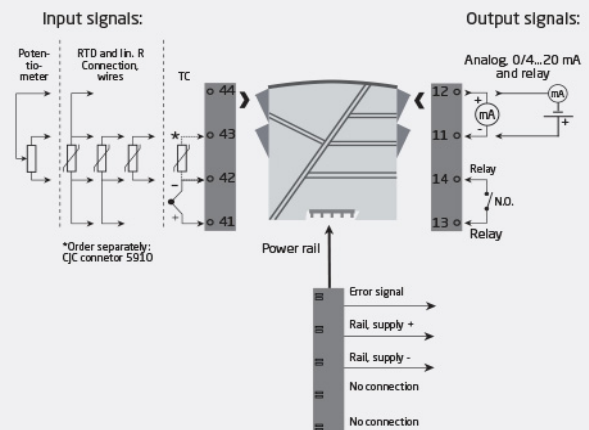

Order:

Type	Max. loop voltage
9116A	U ₀ 28 VDC : 1
	U ₀ 21.4 VDC : 2

Environmental Conditions

Operating temperature.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	185 g
Weight incl. 4501 / 4511 (approx.).....	200 g / 285 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm ² AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...13.2 Hz.....	±1 mm
13.2...100 Hz.....	±0.7 g

Common specifications**Supply**

Supply voltage.....	19.2...31.2 VDC
Fuse.....	1.25 A SB / 250 VAC
Max. required power.....	≤ 2.1 W
Max. power dissipation.....	≤ 1.7 W

Isolation voltage

Test /working: Input to any.....	2.6 kVAC / 300 VAC reinforced isolation
Analog output to supply.....	2.6 kVAC / 300 VAC reinforced isolation
Status relay to supply.....	1.5 kVAC / 150 VAC reinforced isolation

Response time

Temperature input, programmable (0...90%, 100...10%).....	1...60 s
mA / V input (programmable).....	0.4...60 s

Auxiliary supplies

9116B1: 2-w. sup. (term. 54...52).....	28...16.5 VDC / 0...20 mA
9116B2: 2-w. sup. (term. 54...52).....	21.4...16.5 VDC / 0...20 mA

Programming..... Communication enabler 4511 / Programming front 4501

Signal dynamics, input.....	24 bit
Signal dynamics, output.....	16 bit
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of selected range

Input specifications**RTD input**

RTD type.....	Pt10/20/50/100/200/250/300/Pt400/500/1000; Ni50/100/120/1000
---------------	--

Cable resistance per wire (max.).....	50 Ω
Sensor current.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Programmable ON / OFF

Short circuit detection..... Yes

TC input

Thermocouple type..... B, E, J, K, L, N, R, S, T, U, W3, W5, LR

Cold junction compensation (CJC) via ext. sensor in connector 5910..... 20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C

CJC via internally mounted

sensor..... ±(2.0°C + 0.4°C * Δt)

Δt = Internal temp.-ambient temp.

Sensor error detection..... Programmable ON or OFF (only wire breakage)

Current input

Measurement range.....	0...23 mA
Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance.....	Nom. 20 Ω + PTC 50 Ω
Sensor error detection.....	Loop break 4...20 mA

Voltage input

Measurement range.....	0...12 VDC
Programmable measurement ranges.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance.....	Nom. >10 MΩ

Output specifications**Current output**

Signal range.....	0...23 mA
Programmable signal ranges.....	0...20/4...20/20...0/20...4 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.01% of span / 100 Ω
Sensor error indication.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Current limit.....	≤ 28 mA

Passive 2-wire mA output

Max. external 2-wire supply.....	26 VDC
Max. load resistance [Ω].....	(Vsupply-3.5)/0.023 A
Effect of external 2-wire supply voltage variation.....	< 0.005% of span / V

Relay output

Relay functions.....	Setpoint, Window, Sensor error, Power and Off
Max. voltage.....	250 VAC / 30 VDC
Max. current.....	2 AAC / 2 ADC
Max. AC power.....	500 VA / 60 W

Status relay

Max. voltage.....	110 VDC / 125 VAC
Max. current.....	0.3 ADC / 0.5 AAC
Max. AC power.....	62.5 VA / 32 W

Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
RoHS.....	2011/65/EU

Approvals

UL.....	UL 61010-1
EAC.....	TR-CU 020/2011
DNV-GL Marine.....	Stand. f. Certific. No. 2.4
SIL.....	SIL 2 certified & fully assessed acc. to IEC 61508